



MANUAL







Introduction

Please read this manual before using the product in order to give you the needed product and installation instruction to assure a seamless installation and non compromised overall sound quality.

Thanks for purchasing our APart Marine speaker. We have put great care and effort in the design in order to bring you high quality sound, even in the most difficult humid places. In humid environments the selection of speaker components is limited to just a few, mostly not the best in audiophile performance. However we have achieved to solve the material challenge and are able to bring you a marine speaker that offers you superb sound for application in yachts, sauna, cruise ships,. This range of speakers are offered in 5½ inch, 6½ inch and 8 inch in order to deliver you a speaker that matches your needs.

Each speaker from this range has a nominal impedance of 8Ω , allowing you to connect up to 2 speakers in parallel per 4Ω stable amplifier channel.

Safety precaution

- Keep this manual for future reference.
- When making the hole in your mounting panel to mount the APart CMAR speaker, make sure there is sufficient clearance behind the panel (no obstructions like A/C channels, power lines etc,.)
- Take care of your speaker wires, they should be free of damage. Damaged speaker wires might result in poor sound quality and can damage amplifiers.
- Only use accessories specified by the manufacturer
- Make sure the mounting panel can support the speakers weight.
- Use sufficient amount of speakers to avoid death-spots.
- No main power shall be connected to the loudspeakers, doing so will damage the speaker.





- This apparatus should only be serviced by qualified personnel. If not warranty might be void.
- Use cable of the right gauge, certainly for long runs.
- Use cables with clear color indication and maintain polarity throughout the whole system.
- Avoid loud feedback from microphones, this can damage your speaker.
- Please check the units condition after unpacking. If the outside of the carton box has been damaged, inform your shipper immediately.
- Take notice that this speaker is a marine type, suitable for use in Sauna, boats, yaghts, cruise ships, outside,.. but it is not intended for being completely submerged in liquid.

Features and benefits


- Superb sound and efficiency, even in humid environments.
- 8Ω voice coil allows to connect up to 2 APart CMAR speakers to a 4Ω stable amplifier channel.
- Stylish grill and mesh that will add a great visual detail to your application without being obvious and drawing too much attention.
- Sealing ring included for watertight mounting on flat surfaces.
- Especially designed fully plastic basket that protects against vertically dropping liquids.
- Stainless steel grille with high resistance against corrosion.





Using the cutout template

Note: when making the hole in your mounting panel, double check if there are no cables or any other obstructions behind the mounting panel. Cutting the mounting panel without this check might result in damaged infrastructure or power lines. Important: While the front side of the APart CMAR speaker line is waterproof, care should be taken to keep the backside free from humidity. We have added a rubber sealing gasket in order to seal the backside of the speaker to your mounting panel. This seal should always be used! Warranty will be void when you do not use this seal.

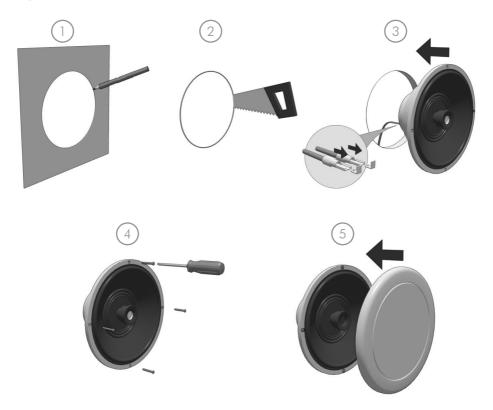






Connecting the speaker


Use the correct polarity when daisy chaining speakers! When a mistake occurs in your daisy chain, it can severely impact speaker performance as there will be audio-cancellation.

The daisy chain options are endless and the setup will depend on the capabilities of your amplifier. Make sure when daisy chaining speakers that the total impedance is not lower than the lowest specified impedance of your amplifier. Not following this rule might result in distorted sound and might even damage your amplifier.

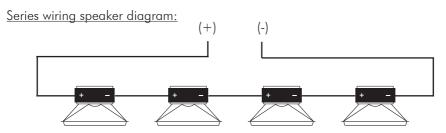

Total resistance = R1 + R2 + R3 + R4 + ...

Parallel wiring speaker diagram:



Total resistance =
$$\frac{1}{1/R1 + 1/R2 + 1/R3 + 1/R4 + ...}$$

R1 = Resistance of speaker 1

R2 = Resistance of speaker 2

R3 = Resistance of speaker 3

R4 = Resistance of speaker 4



0

Specifications


| Technical specifications | | | | |
|--|-----------------------|-----------------------|--------------------|--|
| Specification / Type | CMAR5-W | CMAR6-W | CMAR8-W | |
| Shape: | Round | Round | Round | |
| Rated RMS power: | 25W | 30W | 50W | |
| Music power: | 50W | 60W | 100W | |
| Impedance | 8Ohm | 8Ohm | 8Ohm | |
| Frequency response: | 100Hz to 20KHz | 70Hz to 20KHz | 50Hz to 20 KHz | |
| SPL 1W/1m in dB | 85dB | 88dB | 88dB | |
| Dispersion (at 1kHz, 2kHz, 4kHz, 8kHz in degrees) | 180°,120°,120° | 180°,180°,90° | 180°,100°,60° | |
| HP filter build in: | Yes, HP on tweeter | Yes, HP on tweeter | Yes, HP on tweeter | |
| Woofer size | 5 ^{1/4} inch | 6 ^{1/2} inch | 8 inch | |
| Tweeter size | 1 inch | 1 inch | 1 inch | |
| Color | White | White | White | |
| Chassis Type | Plastic | Plastic | Plastic | |
| Grill material | Stainless Steel | Stainless Steel | Stainless Steel | |
| IP classification | IP65 | IP65 | IP65 | |
| Max operating temp | 95°C | 95°C | 95°C | |
| Removable grill: | Yes | yes | Yes | |
| Fixing type: | Screws | Screws | Screws | |
| CutOut dimensions: | 110mm | 146mm | 186mm | |
| Outside dimensions: | 152mm | 190mm | 221mm | |
| Mounting depth: | 55mm | 61mm | 76mm | |
| Net Weight | 0.6kg | 1 kg | 1.5kg | |
| Gross Weight: | 0.8Kg | 1.3Kg | 2Kg | |







Dimensions

| Dimensions in mm | | | | |
|----------------------|---------|---------|---------|--|
| Specification / Type | CMAR5-W | CMAR6-W | CMAR8-W | |
| А | 152 | 190 | 220 | |
| В | 54 | 60 | 75 | |
| С | 110 | 145 | 180 | |











| Polar diagram | | | | | |
|---------------|-------------|-------------|--|--|--|
| | 1000Hz | 2000Hz | | | |
| CMAR5 | 1998Hs CLIO | 289998 CLIO | | | |
| CMAR6 | 1998Hz CLIO | 2000Hs CLIO | | | |
| CMAR8 | 1998Hz CLID | 2009te CLIO | | | |





| 4000Hz | 8000Hz | |
|-------------|--------------|--|
| 4600Hz CEIO | 899996 CIJO | |
| 4600% CDO | 9999996 CLIO | |
| 4600Hi CLIO | SOCIES CLIO | |





Warranty info

APart-Audio warrants this product to be free of defects in material and workmanship for a period of one year for parts and for a period of one year for labor from the date of original end-user purchase. This warranty is valid only for the original end-user and cannot be transferred.

During the warranty period APart-Audio or one of its authorized service partners shall either repair or replace any product, free of charge, that proves to be defective on inspection by APart-Audio or its authorized service representative.

This warranty does not include, damages or product faults due to abuse, misuse or faulty installation.





| Notes | |
|-------|--|
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |





ANY SUGGESTION?

They are well appreciated and eventually rewarded!
Send your ideas or suggestions to

suggestions@apart-audio.com

Company names, product names, and names of formats etc. are the trademarks or registered trademarks of their respective owners.

© 2011 APart-Audio specifications subject to change without notice.

developed by

Audioprof nv Industriepark Brechtsebaan 8 bus 1 2900 Schoten Belgium

