


- 2.5" voice coil fiberglass former
- Neodymium magnet
- Ventilated magnet and voice coil to reduce power compression
- 95.7 dB sensitivity




Specifications	
Nominal Diameter	318mm (12")
Nominal Impedance	16Ω
Rated Power AES ⁽¹⁾	250W
Continuous Program Power ⁽²⁾	500W
Sensitivity @ 1W/1m ⁽³⁾	95.7dB
Voice Coil Diameter	65mm (2,5")
Voice Coil Winding Depth	18mm
Magnetic Gap Depth	8mm
Flux Density	1.15T
Magnet Weight	220g
Net Weight	2.3kg

Thiele & Small Parameters ⁽⁴⁾			
Re	12.33Ω	Fs	49.0Hz
Qms	9.78	Qes	0.52
Qts	0.49	Mms	49.8g
Cms	212μm/N	Bxl	19.10Tm
Vas	72.2l	Sd	490.9cm ²
X max ⁽⁵⁾	+/-4.6mm	X var ⁽⁶⁾	+/-7.3mm
η ₀	1.53%	Le (1kHz)	1.60mH

Constructive Characteristics	
Magnet	: Neodymium
Basket Material	: Pressed Sheet Steel
Voice Coil Winding Material	: Copper
Voice Coil Former Material	: Fiberglass
Cone Material	: Paper
Cone Treatment	: No
Surround Material	: Treated Cloth
Dust Dome Material	: Solid Paper

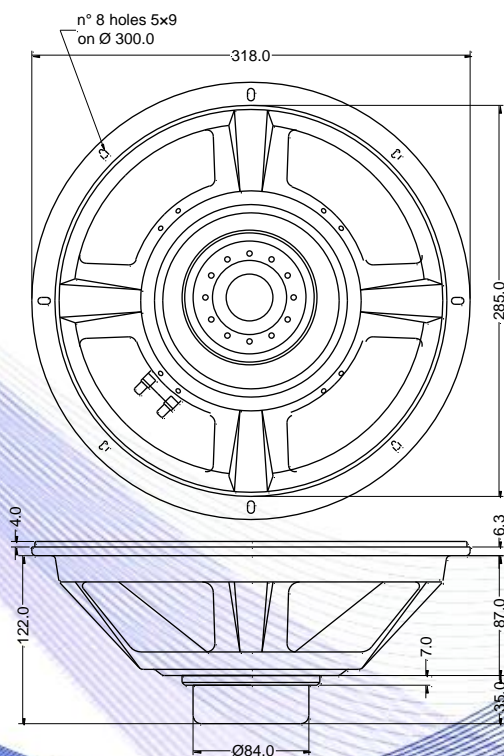

Frequency Response on IEC Baffle (DIN 45575) @ 1W,1m – Free Air Impedance

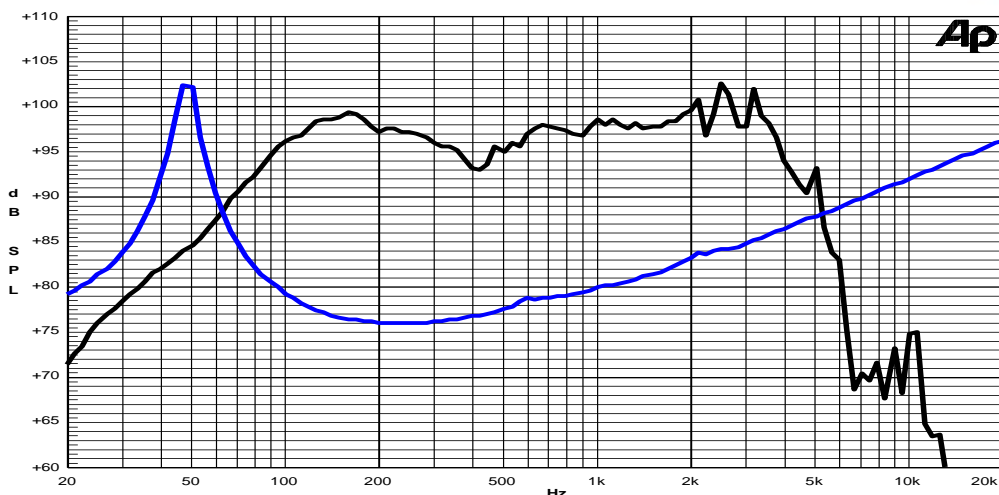

- Note:
- 1 : Rated Power measured with 2 hours test with pink noise signal, 6dB crest factor, loudspeaker mounted on enclosure
 - 2: Power on Continuous Program is defined as 3 dB greater than the Rated Power
 - 3: Calculated by Thiele & Small parameters
 - 4: Thiele & Small parameters measured with laser system without preconditioning test
 - 5: Measured with respect to a THD of 10% using a parameter-based method
 - 6: Value corresponding to a decay of the Force Factor, or Compliance, or both, equal to the 50% of the small signal value.
 - 7: Drawing dimensions: mm
 - 8: The notch around 400Hz on the frequency response is typical of the measurement on IEC baffle