



SY-P290

PC/DVD/HD to HDMI Scaler

OPERATION MANUAL





Precautions

Failure to follow the precautions described below may cause damage to this device and void the warranty.

- DO NOT open the case. This will void the warranty, if you find a problem with this product, please return it to your retailer or seller who will assist you or provide you with a solution.
- DO NOT use third-Party AC adaptors or power cords. This may damage the Matrix.
- DO NOT bump, jar or drop the product because it may cause damage and void the warranty.
- DO NOT allow liquids to come into contact with the Matrix because they may cause damage.



Table of Contents

1.	Introduction	1
2.	Application	1
3.	Package Contents	1
4.	System Requirements	2
5.	Features	2
6.	Operation Controls and Functions	3
6.1	Front Panel	3
6.2	Rear Panel	4
7.	Connection Diagram	5
8.	Specifications	6





1. Introduction

This Scaler device is designed to display your PC/HD images on a HDTV at a higher resolution. It can upscale PC/DVI /HD (component) input sources to a wide range of PC/HD resolutions and output the signal via HDMI. The supported output resolutions are XGA/UXGA/720p and 1080p.

This unit allows the user to select the required output resolution for the best picture quality. It will also transfer the signal at the analogue/digital audio input to the HDMI output.

2. Applications

- Individual home use
- Classroom presentations
- Meeting demonstrations
- Gaming / entertainment

3. Package Contents

- SY-P290 Scaler
- Power adaptor
- Operation Manual



4. System Requirements

- Source with PC,DVI-D or Component output and HDTV/Monitor.
- RCA - D-SUB cable (for connecting component sources) / D-SUB to D-SUB cable for connecting a PC, DVI/HDMI to DVI-D cable for connecting a HDMI source to the input or a DVI display.
- Coaxial or audio phono jack cable for connecting either analogue or digital audio output from your source.


5. Features

- HDMI 1.2, HDCP 1.1 and DVI 1.0 compliant.
- Inputs Support the following PC/HD TV resolutions:
 - DVI: VGA~WUXGA
 - PC: VGA~WUXGA
- HD TV: 480i~1080p50/60Hz
- Scale any supported resolution to XGA/UXGA/720p/1080p).
- Supports PC&DVI to HDMI output.
- Transfer L/R or coaxial audio input to HDMI.
- Input and output selection buttons for quick and easy operation.



6. Operation Controls and Functions


6.1 Front Panel

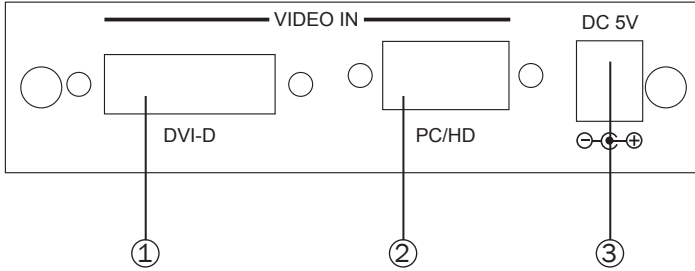

1. **DVI-D IN:** Connect the DVI (29 pin) port to the DVI output port of your source equipment such as a PC. Supported Resolutions: VGA~ WUXGA
Note: DVI-D input can only accept a DVI-D signal.
2. **PC/HD input:** Connect the PC input D-Sub (15-pin) port to the D-Sub output port of your source equipment such as a PC or use a D-Sub to 3RCA cable to connect to a component video source such as a DVD player.
Supported PC Resolutions: VGA~ WUXGA
Supported Component Resolutions: 480i~1080i, 1080P 50/60
Note: Output timing 1080p 50Hz may not be supported by some TV when the input is 576i/p50, 720p50 and 1080i/p50.
3. **Power:** Plug the 5VDC power supply into the unit and connect the adaptor to an AC wall outlet.



6.2 Rear Panel

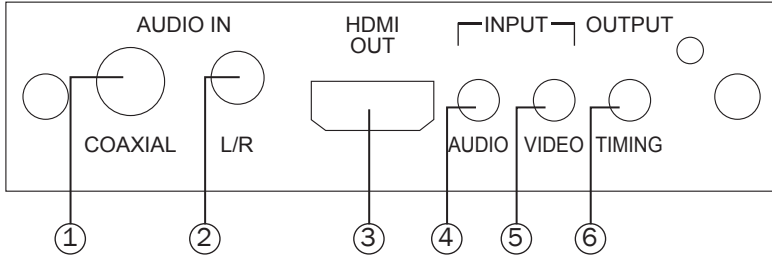


1. Coaxial input: Connect the coaxial audio output of the source device to this input.
2. L/R audio input (3.5mm): Connect the L/R audio from the source device to this input.
3. HDMI output: Connect to your displays hdmi input
4. Audio input Select button: Press the button to access the menu and select which audio input (Coaxial or L/R) you want to transfer to the HDMI output.
5. Video Input Select button: Press the button to access the menu and select between the DVI or PC/HD video as the input source.
6. Output Timing button : Press this button to access the menu and select 720p / 1080p / XGA /UXGA as the output resolution.

Notes:

- Only when HDMI signal is send the selection of audio under HDMI will appear on the display and the audio will support PCM 2ch.
- Press the 'audio' and 'video' buttons simultaneously to set the output to XGA.
- Press the 'audio' and 'timing' buttons simultaneously to set the output to 720p.



7. Connection Diagram

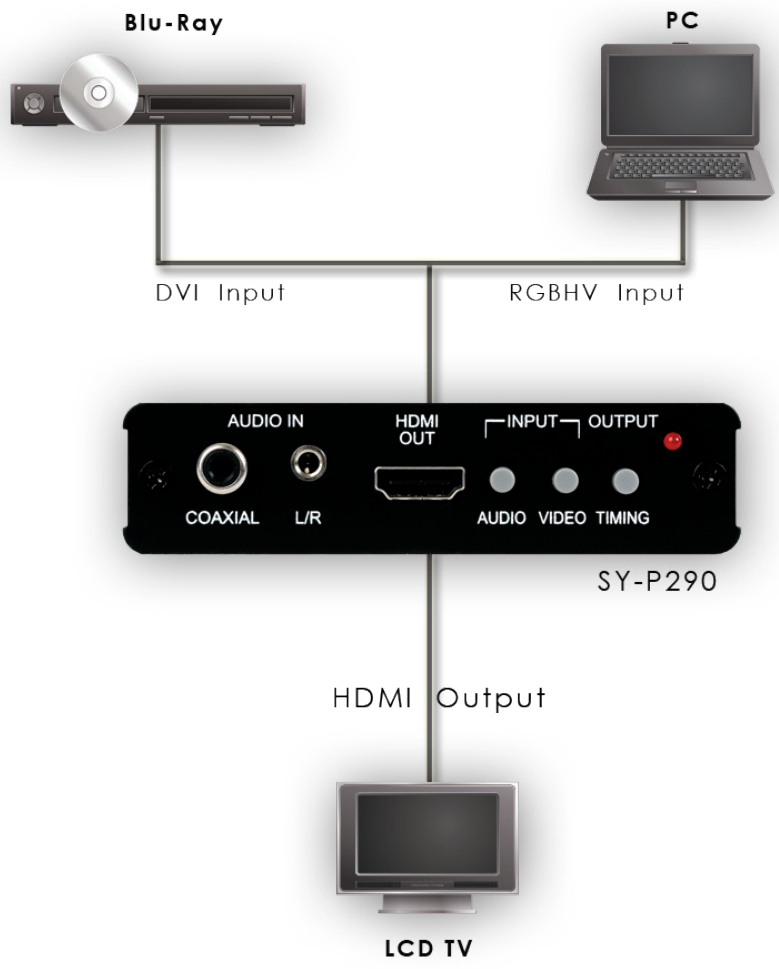



8. Specifications

Input ports	1 x PC/HD 1 x DVI-D 1 x Coaxial Audio 1 x L/R Audio
Output ports	1 x HDMI
Power Supply	5V/2.6A DC (US/EU standards, CE/FCC/UL certified)
Dimensions (mm)	102 (W) x 160 (D) x 25 (H)
Weight (g)	332
Chassis Material	Aluminium
Silk Skin Colour	Black
Operating Temperature	Operating from 0°C ~ 40°C



www.cypeurope.com

