
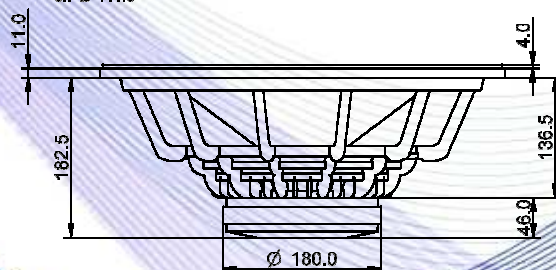


- 3" voice coil aluminium former
- Ferrite magnet
- Cloth surround with DAR technology
- Autoclave waterproof cone treatment
- 96.9 dB sensitivity


Specifications	
Nominal Diameter	462mm (18")
Nominal Impedance	8Ω
Rated Power AES ⁽¹⁾	350W
Continuous Program Power ⁽²⁾	700W
Sensitivity @ 1W/1m ⁽³⁾	96.4dB
Voice Coil Diameter	75mm (3")
Voice Coil Winding Depth	20mm
Magnetic Gap Depth	10mm
Flux Density	1.08T
Magnet Weight	2045g
Net Weight	8.8kg

Thiele & Small Parameters ⁽⁴⁾			
Re	5.10Ω	Fs	34.0Hz
Qms	3.02	Qes	0.51
Qts	0.44	Mms	163.0g
Cms	134μm/N	Bxl	18.50Tm
Vas	259.0l	Sd	1164.2cm ²
X max ⁽⁵⁾	+/-6.0mm	X var ⁽⁶⁾	+/-10.5mm
η ₀	1.89%	Le (1kHz)	1.41mH

Constructive Characteristics	
Magnet	: Ferrite
Basket Material	: Aluminium Die-Cast
Voice Coil Winding Material	: Copper
Voice Coil Former Material	: Aluminium
Cone Material	: Paper
Cone Treatment	: Humidity Resistant Pulp
Surround Material	: Treated Cloth
Dust Dome Material	: Solid Paper

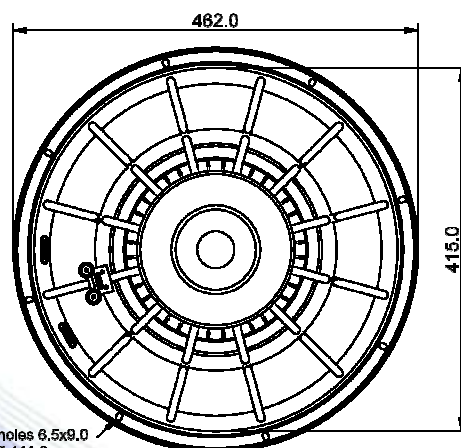

Frequency Response on 150 Litres Vented Box @ 1W,1m – Free Air Impedance

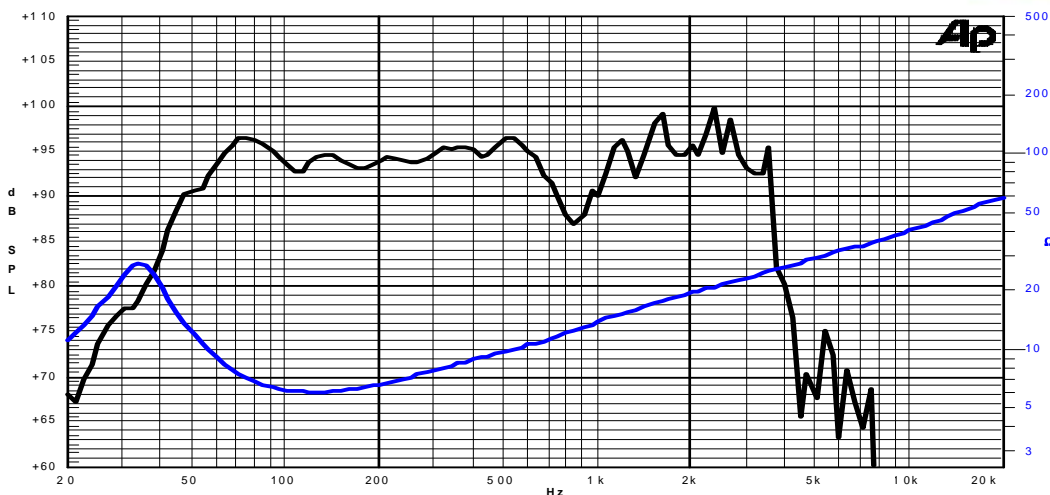

- Note:
- 1 : Rated Power measured with 2 hours test with pink noise signal, 6dB crest factor, loudspeaker mounted on enclosure
 - 2: Power on Continuous Program is defined as 3 dB greater than the Rated Power
 - 3: Calculated by Thiele & Small parameters
 - 4: Thiele & Small parameters measured with laser system without preconditioning test
 - 5: Measured with respect to a THD of 10% using a parameter-based method
 - 6: Value corresponding to a decay of the Force Factor, or Compliance, or both, equal to the 50% of the small signal value.
 - 7: Drawing dimensions: mm