

#### GENERAL CHARACTERISTICS

Nominal Overall Diameter .....	210	mm
Nominal Voice Coil Diameter .....	65	mm
Magnet Weight .....	220	g
Flux Density.....	1.14	T
Weight.....	1.80	Kg

#### THIELE-SMALL PARAMETERS


Voice Coil DC Resistance .....	$R_E$	3.10	Ω
Resonance Frequency .....	$f_s$	84.9	Hz
Mechanical Q Factor.....	$Q_{MS}$	2.50	
Electrical Q Factor.....	$Q_{ES}$	0.28	
Total Q Factor .....	$Q_{TS}$	0.25	
Mechanical Moving Mass .....	$M_{MS}$	20.6	g
Mechanical Compliance .....	$C_{MS}$	171	μm/N
Force Factor .....	$B \times l$	11.07	Wb/m
Equivalent Acoustic Volume.....	$V_{AS}$	11.0	lt.
Maximum Linear Displacement ....	$X_{MAX}$	+/-2.0	mm
Reference Efficiency .....	$\eta_0$	2.35	%
Diaphragm Area .....	$S_D$	213.8	cm <sup>2</sup>
Losses Electrical Resistance.....	$R_{ES}$	27.9	Ω
Voice Coil Inductance @ 1kHz .....	$L_E$	0.28	mH

#### CONSTRUCTIVE CHARACTERISTICS

Magnet.....	Neodymium
Voice Coil Winding.....	Aluminium
Voice Coil Former.....	Kapton
Cone .....	Paper
Surround.....	Treated Cloth
Dust Dome .....	Solid Paper
Basket .....	Aluminium Die-Cast


#### ELECTRICAL CHARACTERISTICS

Nominal Impedance.....	4	Ω
Musical Power .....	500	W
Rated Power* .....	250	W
Sensitivity @ 1 W, 1 m .....	97.0	dB

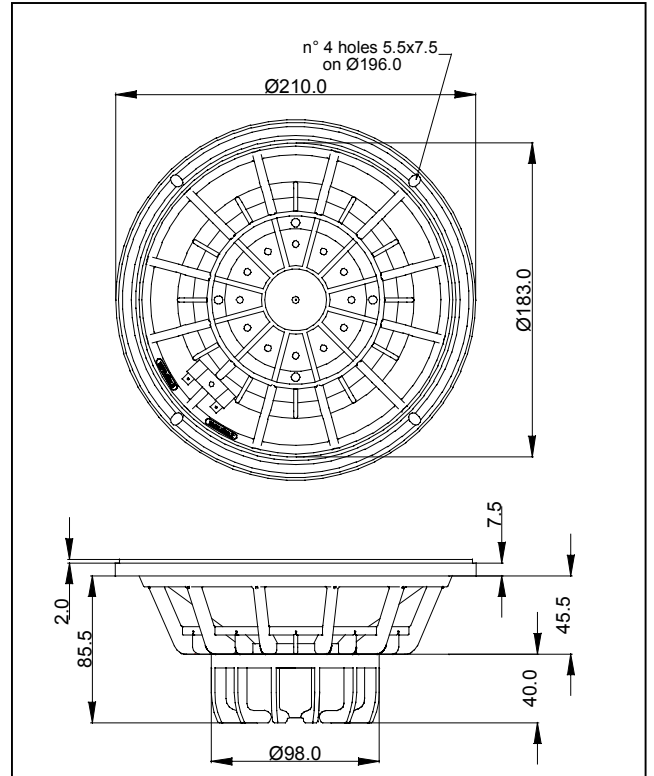

\*rated power measured with 2 hours test with pink noise signal, 6 dB crest factor, loudspeaker mounted on enclosure  
Thiele-Small parameters measured with LASER system

Frequency Response on IEC Baffle (DIN 45575) @ 1 W, 1 m - Impedance

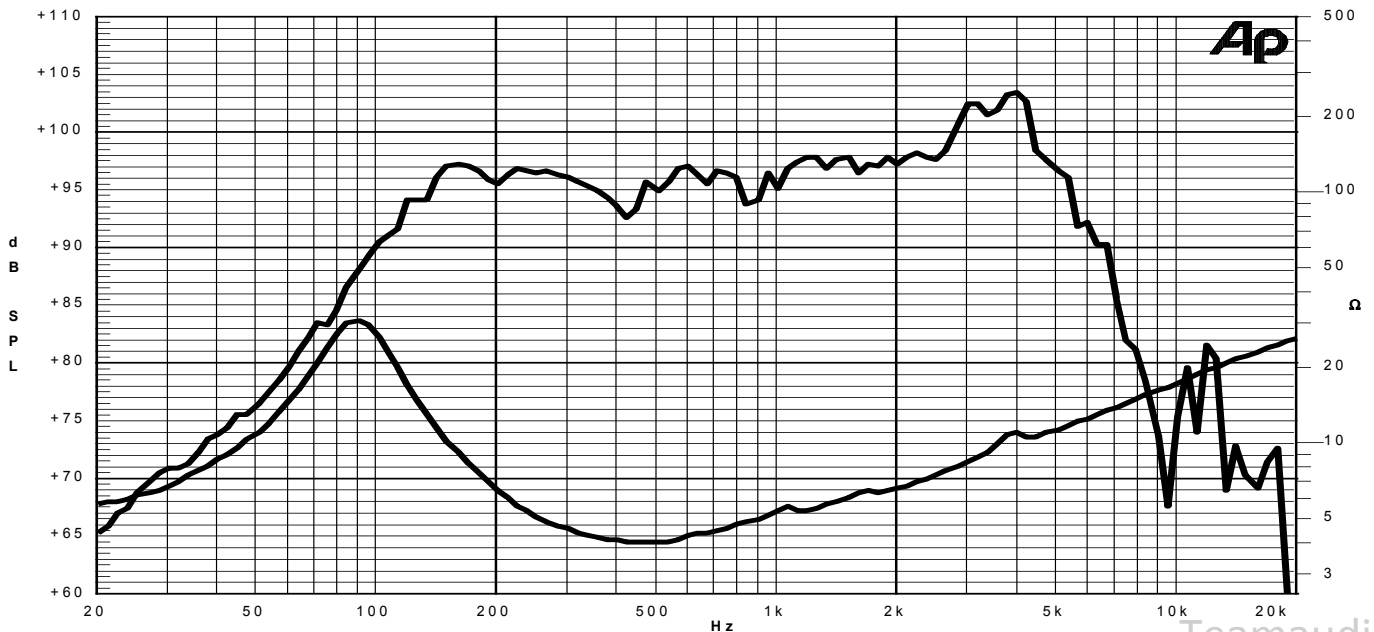

Due to continuing product improvement, the features and the design are subject to change without notice.

29/09/08