
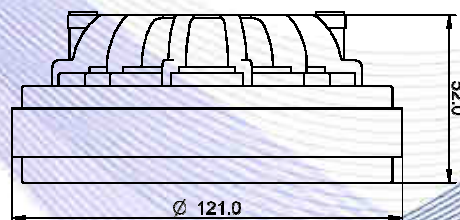


- 1.7" voice coil Kapton former and flat aluminium wire
- 1" horn throat diameter
- Titanium diaphragm
- Ferrite magnet circuit with copper demodulating ring
- 106.3 dB sensitivity

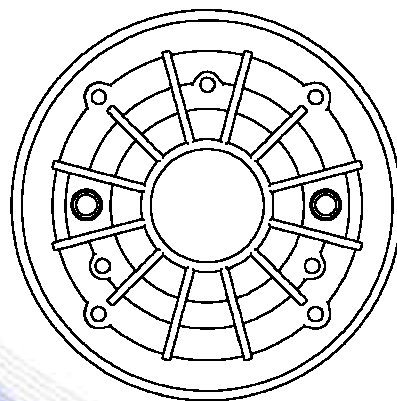


Mounting holes: 2 holes M6 on Ø76mm

Specifications	
Nominal Diameter	120mm
Nominal Impedance	8Ω
Rated Power AES ⁽¹⁾ (1500 - 20000 Hz)	60W
Continuous Program Power ⁽²⁾	120W
Sensitivity @ 1W/1m ⁽³⁾	106.3dB
Voice Coil Diameter	44mm (1.7")
Voice Coil Winding Depth	2.6mm
Magnetic Gap Depth	3mm
Flux Density	1.70T
DC Resistance	5.80Ω
Resonance Frequency	1.10kHz
Magnet Weight	640g
Net Weight	1.9kg
Recommended Crossover Frequency	1.6kHz
Throat Diameter	25.4mm (1")

Constructive Characteristics	
Magnet	: Ferrite
Voice Coil Winding Material	: Aluminium Flat Wire
Voice Coil Former Material	: Kapton
Diaphragm	: Titanium
Ferrofluid in Air Gap	: No
Spare Part Code	: Z009396

Free Air Frequency Response with 6x11 inches horn @ 1W,1m – Impedance (without horn)

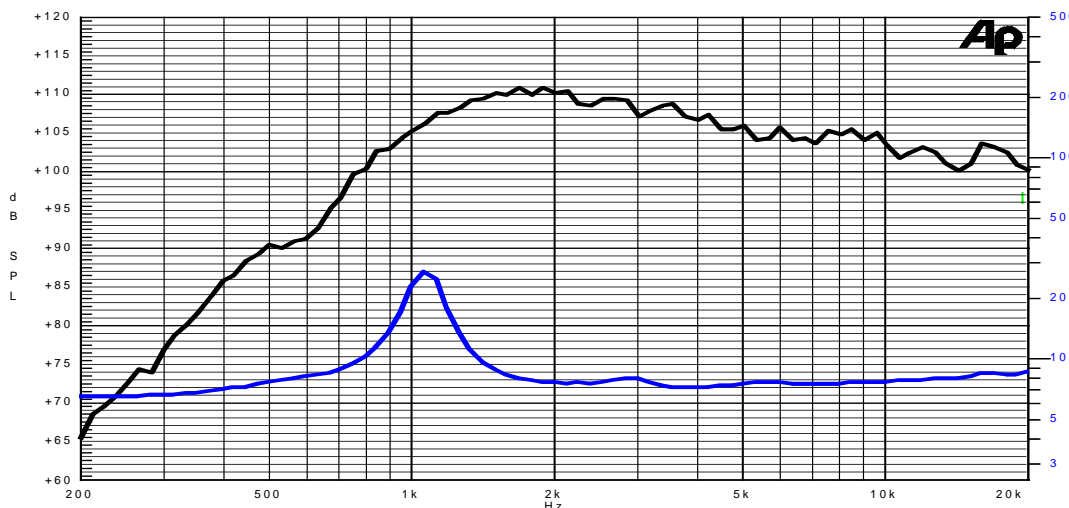

- Note:
- 1 : Rated Power measured with 2 hours test with pink noise signal, 6dB crest factor, loudspeaker mounted on enclosure
 - 2: Power on Continuous Program is defined as 3 dB greater than the Rated Power
 - 3: Measured at 1W,1m in axis within the frequency range
 - 4: Drawing dimensions: mm