

TECHNICAL SPECIFICATIONS

Throat diameter	25 mm. 1 in.
Rated impedance	8 ohms.
Minimum impedance	5.5 ohms @ 4.5 kHz
D.C. Resistance	5.6 ohms.
Power capacity *	40 w AES above 1.5 kHz
Program power	80 w above 1.5 kHz
Sensitivity **	108 dB 1 w @ 1m coupled to TD250 horn
Frequency range	0.8 - 20 kHz
Recommended crossover	1.5 kHz or higher (12 dB/oct. min.)
Voice coil diameter	44.4 mm. 1.75 in.
Magnetic assembly weight	0.6 kg. 1.32 lb.
Flux density	1.8 T
BL factor	8 N/A

MOUNTING INFORMATION

Overall diameter	80 mm. 3.15 in.
Depth	57 mm. 2.24 in.
Mounting	Three M4 threaded holes, 120° apart on 57 mm. (2.24 in.) diameter circle. Mounting hardware is supplied.
Net weight	0.7 kg. 1.54 lb.
Shipping weight	0.8 kg. 1.76 lb.


MATERIALS

- **Diaphragm:** mylar.
- **Voice coil:** edgewound aluminium ribbon.
- **Voice coil former:** polyimide.
- **Magnet:** neodymium.

GENERAL DESCRIPTION


This 1" compression driver features a lightweight mylar diaphragm that provides an excellent high frequency response with low harmonic distortion. Other key features of this model are its excellent sensitivity (108 dB) and its low weight, due to the use of a neodymium magnet. By the other hand, the coil-diaphragm assembly is easily field replaceable without soldering

FREQUENCY RESPONSE AND DISTORTION CURVES

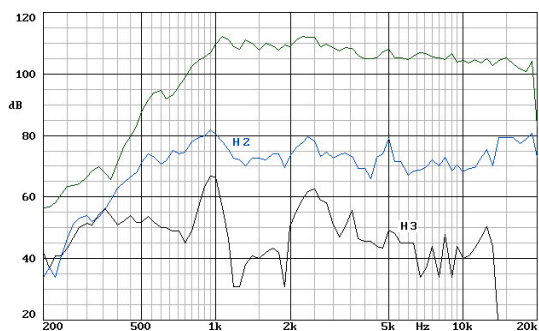

Note: on axis frequency response measured coupled to TD-250 horn in anechoic chamber, 1w @ 1m.


FREQUENCY RESPONSE AND DISTORTION CURVES

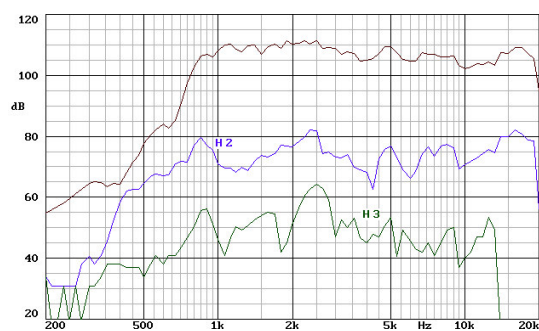

Note: on axis frequency response measured coupled to TD-245 horn in anechoic chamber, 1w @ 1m.



DIMENSION DRAWINGS

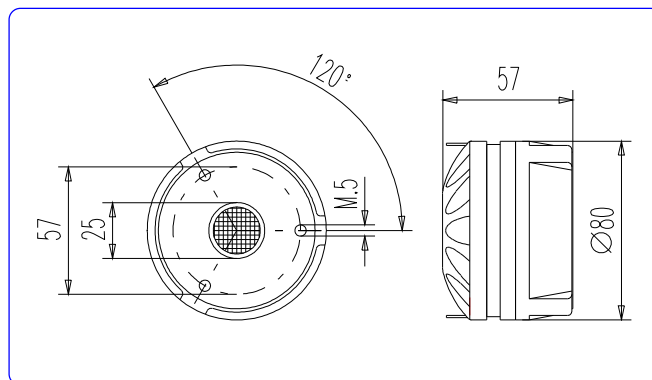

Notes:

*The power capacity is determined according to AES2-1984 (r2003) standard.
Program power is defined as the transducer's ability to handle normal music program material.
**Sensitivity was measured at 1 m distance, on axis, with 1 w input, averaged in the range 1-7 kHz.