

LOWS:  
Loose

MIDS:  
Firm

HIGHS:  
Smooth

OVERDRIVE:  
Crunchy

## Sound Features:



### Guitarist Description:

Rich, warm tone.  
It accentuates the higher frequencies in sparkling detail.

Specifications	
Nominal Diameter	259 mm (10")
Nominal Impedance	8 Ω
Rated Power AES <sup>(1)</sup>	25 W
Continuous Program Power <sup>(2)</sup>	50 W
Sensitivity @ 1W/1m	94.2 dB
Voice Coil Diameter	25 mm
Voice Coil Winding Depth	8 mm
Magnetic Gap Depth	6 mm
Flux Density	0.96 T
Magnet Weight	200 g
Net Weight	1.4 kg

Thiele & Small Parameters <sup>(3)</sup>			
Re	6.68 Ω	Fs	97.0 Hz
Qms	14.83	Mms	15.2 g
Qts	1.62	Bxl	5.83 Tm
Cms	177 μm/N	Sd	330.1 cm <sup>2</sup>
Vas	27.4 l	Le (1kHz)	0.54 mH

Constructive Characteristics	
Magnet	AlNiCo
Basket Material	Pressed Sheet Steel
Voice Coil Winding Material	Copper
Voice Coil Former Material	Kapton
Cone Material	Paper
Surround Treatment	No
Surround Material	Paper - Integrated
Dust Dome Material	Felt

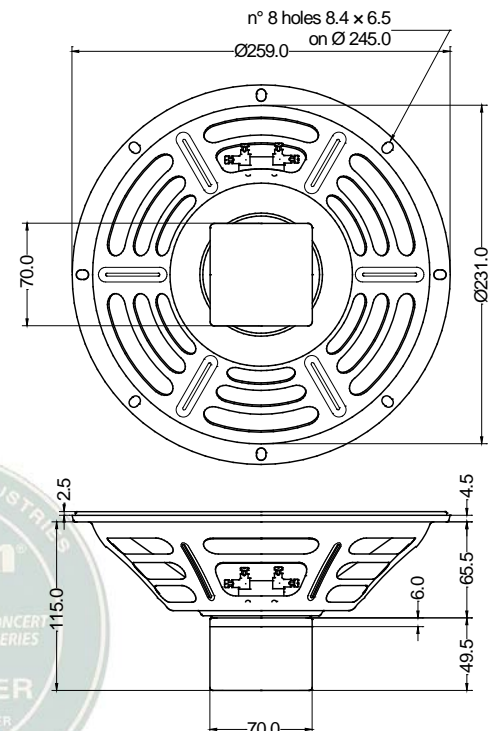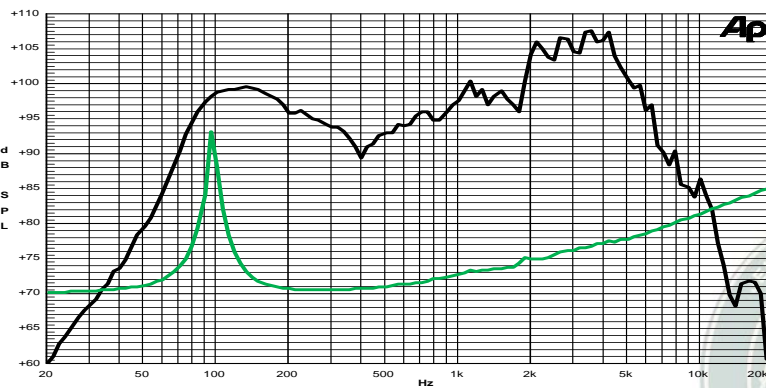

- Note:
- 1: Rated Power measured with 2 hours test with pink noise signal, 6dB crest factor, loudspeaker mounted on enclosure
  - 2: Power on Continuous Program is defined as 3 dB greater than the Rated Power
  - 3: Thiele & Small parameters measured with laser system without preconditioning test
  - 4: Drawing dimensions: mm
  - 5: The notch around 400Hz on the frequency response is typical of the measurement on IEC baffle