

DK 8 100 V/20 OHM

Art. No. 50203

Re-entrant [horn speaker](#) with 100 V transformer. Five-stage level adjustment for 100 V model via knob, in addition 20 Ohm possible. High [sound pressure](#) and wide range of [frequency response](#) guarantee excellent voice quality. Pivoting metal frame for mounting walls, ceilings, columns etc.




Typical applications:

- PA systems in factory halls, railway stations etc.
- outdoor PA


Properties:

- functionally at low temperature according to EN 60068-2-1 (-25°C; 96h)
- up to the standards of the Germanischer Lloyd (requirements for electrical equipment / low temperature)

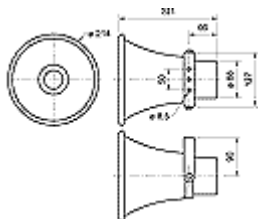


Technical Data:


Transformer matching	15; 10; 5; 3; 1 Watt; 20 Ohm
Sound pressure level	107 dB (1W/1m) @ 1144 Hz
Sensitivity	105 dB (1W/1m)
Frequency response (-10 dB)	400 - 5000 Hz
Mean sound pressure level	105 dB (1W/1m)
Max. sound pressure level	117 dB (15W/1m)
Net weight	1,4 kg
Length of cable	60 cm
Protective system	IP 65

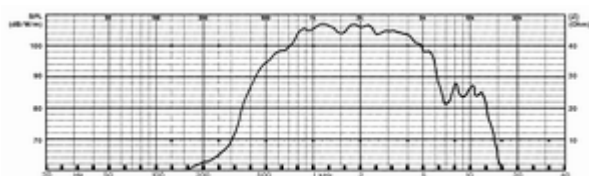


[frequency response](#)

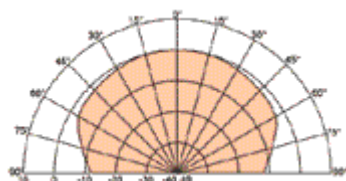

[radiation pattern 1000 Hz](#)

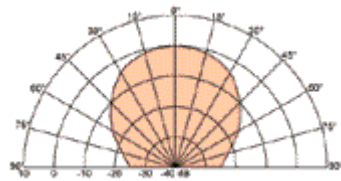

[radiation pattern 2000 Hz](#)

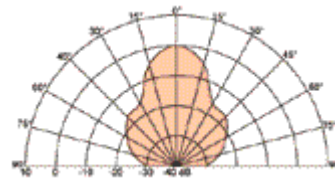

[radiation pattern 5000 Hz](#)

IP 66

