


CP 13 4 OHM

Art. No. 4454

Very compact 13 mm (0.5") ferro-fluid cooled tweeter with a polycarbonate cone, featuring an absolutely linear frequency response. Crisp high-range reproduction and excellent omnidirectional sound distribution. Tweeter in low to medium-output 2- or 3-way systems or as an additional tweeter. Can be surface or flush mounted. Especially suitable for mounting in confined spaces (e.g. mirror vicinity and door handles).

Accessories: Mounting ring and connecting cables included

Used in:
NANO SAT
VOX 80

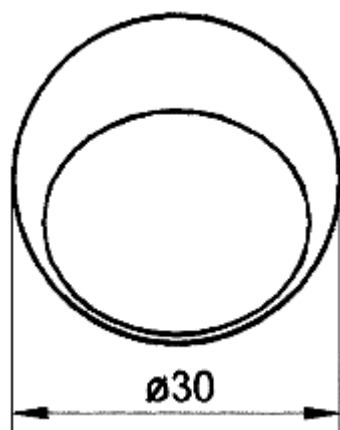

Technical Data:

Nominal power handling with high pass	60 Watt (12 dB/Okt.; 6000 Hz)
Peak power handling with high pass	100 Watt (12 dB/Okt.; 6000 Hz)
Nominal impedance	4 Ohm
Frequency response (-10 dB)	1700 - 22000 Hz
Mean sound pressure level	86 dB (1W/1m)
Resonance frequency f_s	2400 Hz
Voice coil diameter	1,3 cm
Cutout diameter	3,35 cm
Net weight	0,026 kg
D.C. resistance R_{dc}	3,3 Ohm
Inductance of the voice coil L	0,4 mH

Similar products

DTW 72 8 OHM

