



VIPERA F6

Le:	1 mH
Re:	3.4 ohm
Fs:	47 Hz
Qms:	3.86
Qts:	0.63

Vas:	6.49 l
Bl:	7.5 N/A
Freq.Resp:	40-1800 Hz
Sd:	122 cm²
Xmax:	26.00 mm
Pmax:	300 W
dB SPL:	87 dB

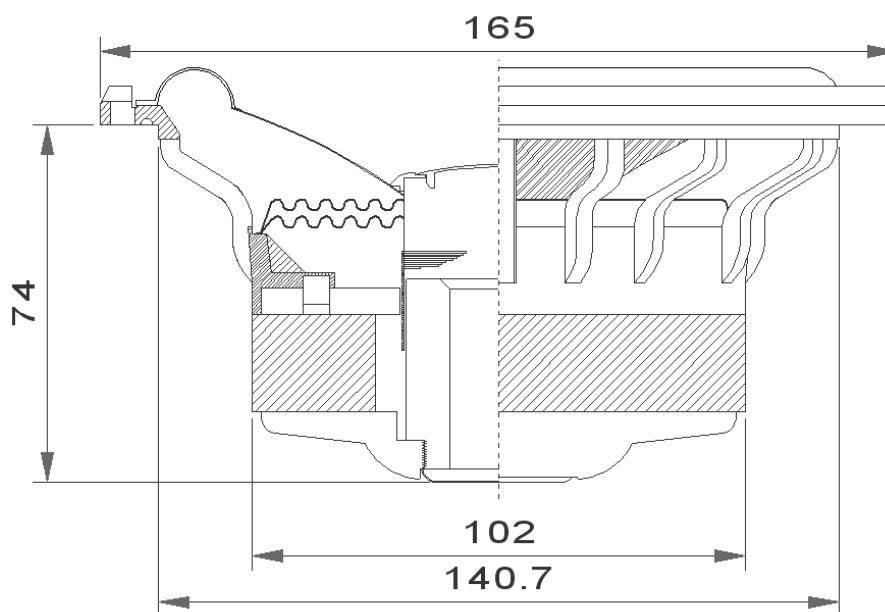

VIPERA F6 PHASE / IMPEDANCE

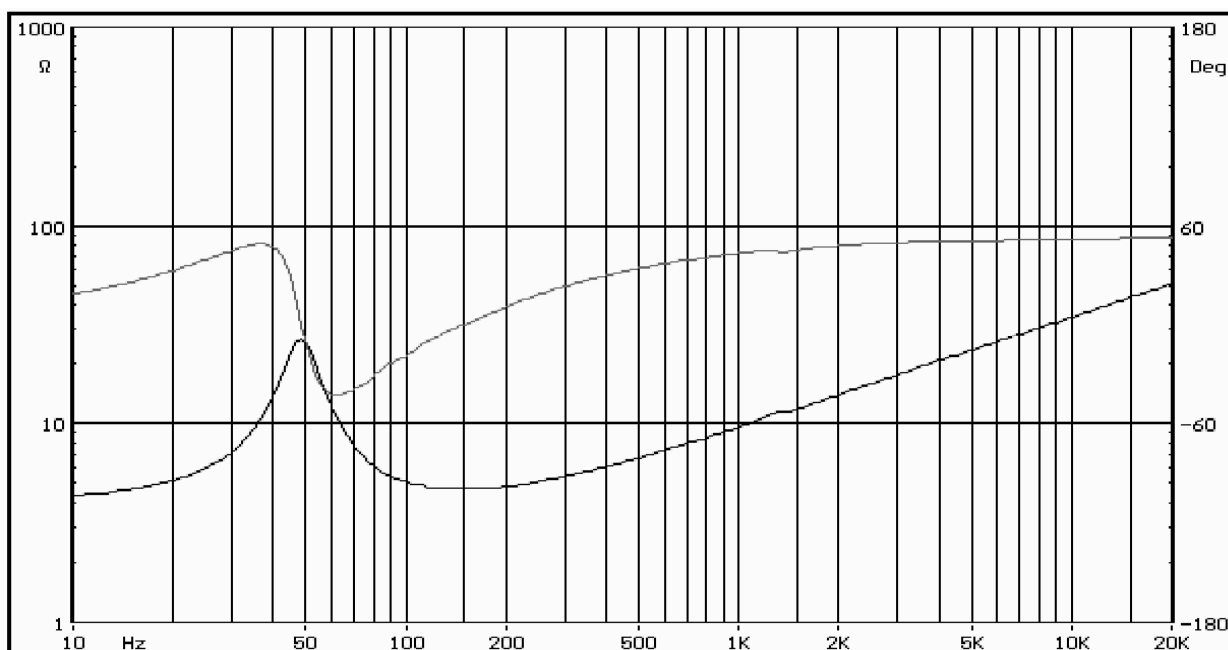

TECHNICAL FEATURES

- CONE: Paper / Fiberglass in double coat treated for min. cone flexing and max. dumping, treated with an internal procedure in order to restore the piston movement.
- SUSPENSION: injection rubber / SPIDER: No.2pcs. in conex
- VOICE COIL: OFC voice coil on alu-former (\varnothing 40mm). Vented pole for forced air cooling .
- BASKET, MAGNET: multi reinforced Aluminum. Magnet with ferrite ring.

This woofer has been created to satisfy those people who requires a great extension to the low frequencies in door.

Phase and Impedance curves are measured after 20 hour of use at 40 W RMS, so are the T/S parameters. Due to the continue research and development, these information are subject to change without notice.

Laboratorio Audio s.n.c. Via del Progresso 26/A Castelgomberto (VI) AD audio development.