



# W5

Sd:	78 cm <sup>2</sup>
Vas:	2.34 l
Cms:	2.7e-04 m/N
Cas:	1.7e-08 m/N
Mmd:	10,94 gr
Mms:	11,26 gr
Rms:	1.42 Ns/m
Fs:	91 Hz
Bl:	4.48 N/A
Re:	2.60 ohm
Le:	0.51 mH
Qms:	4.54
Qes:	0.83
Qts:	0.70
V/C l:	17.00 mm
Xmax:	12.00 mm
Pmax:	50 W
dBSpl:	88 dB

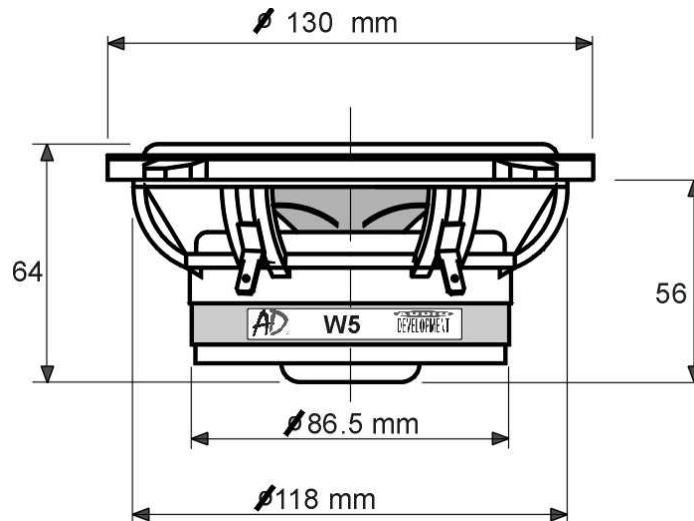

## W 5 IMPEDANCE

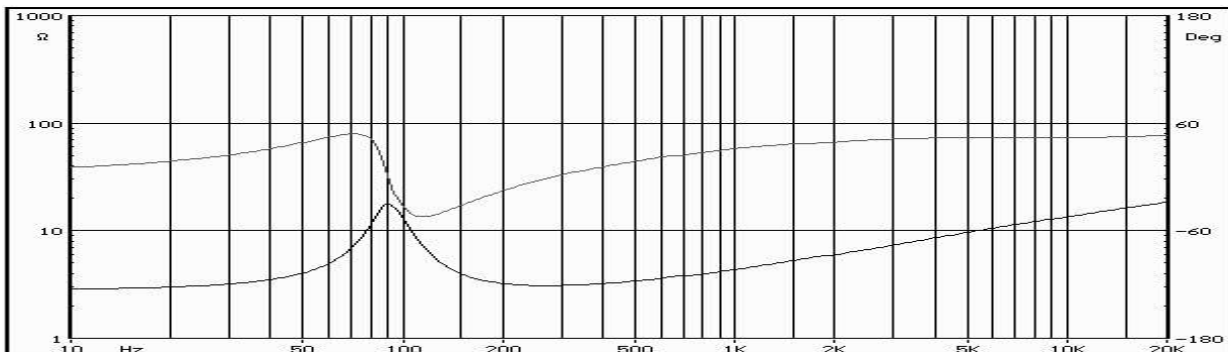

## DESIGN FEATURES

- CONE: Double layer fibreglass with rubber suspension.
- VOICE COIL: Pure copper wire on aluminium former ( $\varnothing$  26 mm).
- BASKET: Owner's design, a PPO chassis injected with fibreglass, in order to low down undesired distortions.
- DUST COVER: ABS, glued directly to the V/C former, with calibrated weight and dimensions in order to reach the desired Mms.

Coming from the old "Zero" line, this 13 cm. is the evolution to a more "up to date" version, satisfying the requests of those who are looking for the best even without the use of an external amplifier, or those who want a no-compromise quality also for a rear channel or ambience.

Phase and impedance curves are measured after 20 hours burn-in at 30 W RMS, so are the T / S parameters. Due to the continue research and development, these information are subject to change without notice.