

**KEY FEATURES**

- Coaxial loudspeaker
- Excellent performance/price ratio
- High sensitivity (86 dB)
- Low distortion
- Polypropilene cone
- Extended frequency response (up to 20 kHz)
- Designed for all kind of public address applications

**TECHNICAL SPECIFICATIONS**

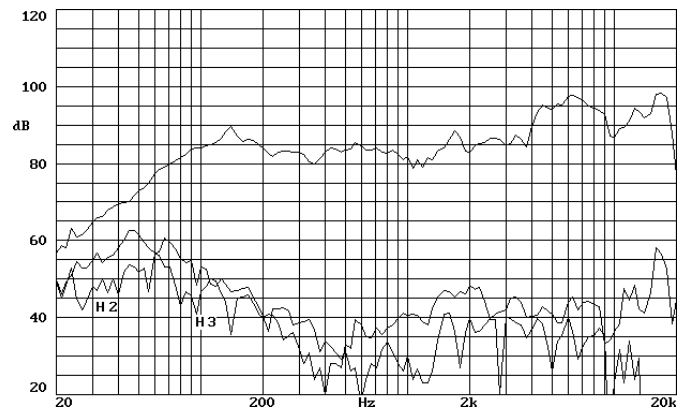
Type	Full range coaxial loudspeaker
Nominal diameter	130 mm. 5 in.
Rated impedance	8 ohms.
Power capacity	25 w RMS
Sensitivity	86 dB, 1 w @ 1 m
Frequency range	55-20000 Hz

**MOUNTING INFORMATION**

Overall diameter	130 mm. 5 in.
Mounting diameter	114 mm. 4.5 in.
Depth	61 mm. 2.4 in.
Net weight	0.72 kg. 1.6 lb.

**MATERIALS**

- **Basket:** metal
- **Cone:** polypropilene
- **Surround:** butyl
- **Voice coil:** copper

**FREQUENCY RESPONSE AND DISTORTION CURVES**

Note: on axis frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1w @ 1m.