


Specifications

Diameter:	26mm
Sensitivity:	92 dB
Power Handling:	10 WRMS (100W Pk)
Frequency Response:	1,500 ~ 20,000 Hz
Nominal Impedance:	4 Ohms
Voice Coil Diameter:	1.0" (25mm)
Peak Xmax:	N/A
Magnet Weight:	Neodymium
Surround	N/A
Frame	Molded
Dome	Silk

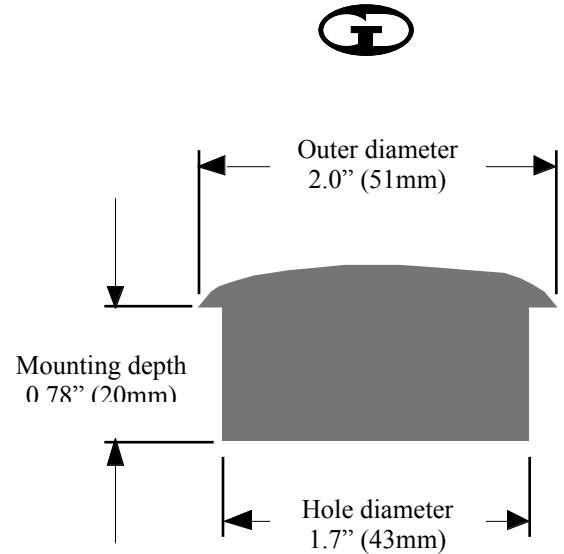

Parameters

Free Air Resonance:	1,500 Hz
Voice Coil DC Resistance:	4.3 ohms
Voice Coil Inductance @ 1 kHz:	0.015 mH
Mechanical Q (Q_{ms}):	N/A
Electrical Q (Q_{es}):	N/A
Total Q (Q_{ts}):	N/A
Compliance Volume (V_{as}):	N/A

