


ifi

Cable series 4.4 to 4.4 cable

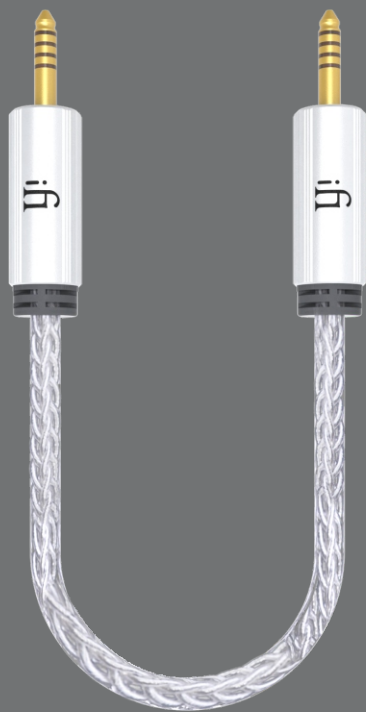

4.4 to 4.4 cable

Meet the **iFi 4.4mm to 4.4mm cable**, created to give you maximum quality balanced signal transfer and minimum interference.

iFi 4.4mm to 4.4mm cable employs heavy OFHC continuous cast copper, silver matrix conductors 14AWG for the best signal transfer.

The cable construction is a custom helix design, minimised both in capacitance and inductance, minZ™. It also has intrinsic shielding provided by minZ™ helix construction. They protect the cable from RFI and EMI noise and provide the cleanest transfer medium possible.

To further insulate the cable, we adopted the RoHS compliant, excellent dielectric property and super-soft (60P) HD polymer with 1500V AC spark resistance.



Gold-plated smooth surface
Precise angle machining
1mm raised lip



Specifications

Construction:	Minimum inductance and capacitance minZ™ (for: minimum impedance) helix construction
Conductors:	14AWG
Conductor material:	Heavy OFHC continuous cast copper silver matrix
Insulation:	RoHS compliant super-soft (60P) HD polymer
Shielding:	Intrinsic shielding provided by minZ™ helix construction
AC spark insulation:	1500V
Connectors:	iFi 'FINAL' 4.4 connectors
Insulation resistance:	100Mohm
Lengths:	300 mm (11.8")
Weights:	25 g (0.9 oz)
Warranty period:	12 months

Specifications are subject to change without notice.



ifi-audio.com
ver 1.0