

Elex-R


Integrated Amplifier

User guide

Guide utilisateur / Guia del usuario / Bedienungsanleitung / 使用说明书


Front view

Vue avant / Vista frontal / Frontansicht / 正面

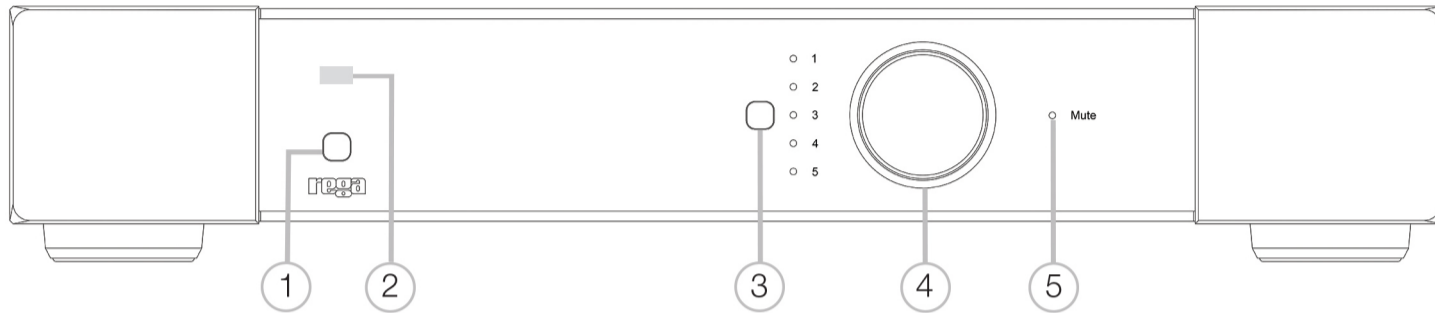


Rear view

Vue arrière / Vista posterior / Rückansicht / 背面

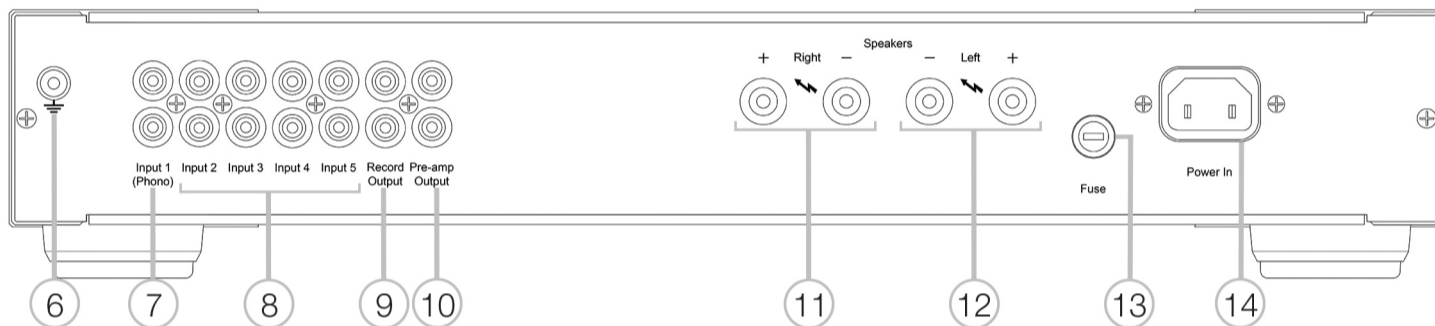

Remote


Télécommande / Remoto / Fernbedienung / 遙控

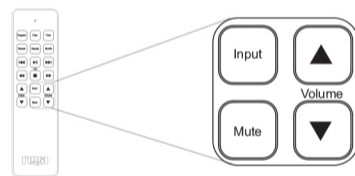


	English	Français	Español	Deutsch	中国語
1	Power on/off	Marche/arrêt	Encendido/apagado	Netzschalter	電源開/關
2	Remote receiver	Télé-récepteur	Receptor del mando	Fernbedienungsempfänger	接收器
3	Input selector	Sélecteur d'entrée	Selector de fuente	Eingangswahlschalter	輸入端選擇
4	Volume control	Contrôle du volume	Control de volumen	Lautstärkereglер	音量控制
5	Mute	Muet	Silencio	Stummschaltung	無聲
6	Tonearm ground	Vis de terre	Toma de Tierra	Tonarmmasse	唱臂地面
7	Phono input	Entrée phono	Entrada de fono	Phono eingang	唱机輸入端
8	Line inputs	Entrées line	Entradas de linea	Hochpegel eingang	輸入端
9	Record output	Sortie enregistreur	Salida de grabación	Monitor ausgang	出端
10	Pre-amp output	Sortie pré-ampli	Salida pre-amplificador	Vorverstärker ausgang	出端
11	Right speaker	Enceinte droite	Altavoz derecho	Rechten lautsprecher	右出端
12	Left speaker	Enceinte gauche	Altavoz izquierdo	Linker lautsprecher	左出端
13	Fuse	Fusible	Fusible	Netzsicherung	保險絲
14	Power	Prise d'alimentation	Toma de alimentacion	Netzbuchse	電源

Set-up


Power input
Prise d'alimentation / Toma de alimentación
Netzbuchse / 电源

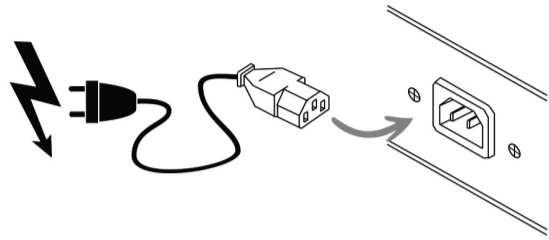


Speaker outputs (2)
Sorties enceinte / Salidas altavoz
Lautsprecher ausgang / 音频输出端

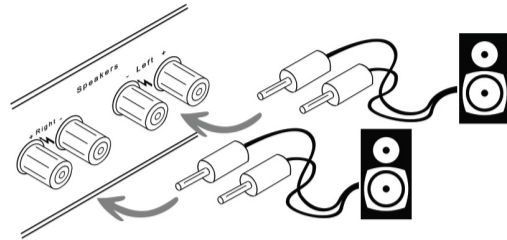


Phono input
Entrée phono / Entrada de fono
Phono eingang / 输入端

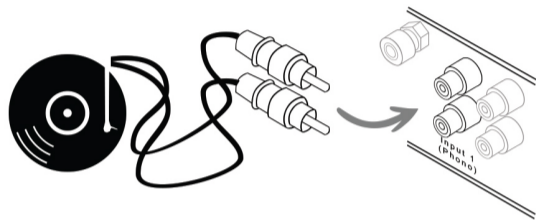


Pre-amp output
Sortie pré-ampli / Salida pre-amplificador
Vorverstärker ausgang / 出端

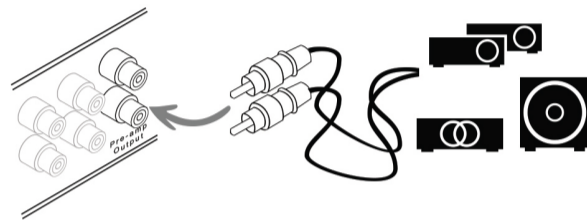

Line inputs (4)
Entrées line / Entradas de linea
Hochpegel eingang / 输入端

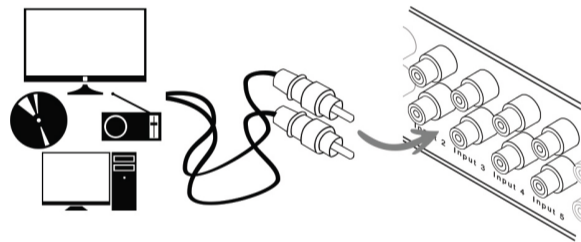

Record output
Sortie enregistrement / Salida de grabación
Monitor ausgang / 注册出端

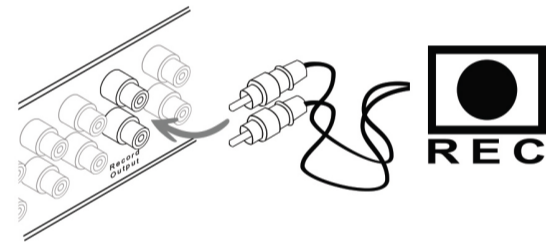

Specifications

Power Supply
Voltage: 230V or 115V
Frequency: 60 or 50Hz
Power Consumption: 250W
230V Fuse: T3.15AL 20mm
115V Fuse: T5AL 20mm

Inputs
Phono input sensitivity: 1.7mV (47K Ω // 220pF)
Phono maximum input level: 100mV
Line input sensitivity: 164mV (40K Ω)
Line maximum input level: 10V

Outputs
Speakers output power: 90W (6 Ω)
Record output level: 164mV
Record output impedance: 470 Ω
Pre-amp output level: 625mV
Pre-amp output impedance: 600 Ω

*Full product details and specifications available at www.rega.co.uk



- This unit can become hot. Always allow adequate air circulation.
- Never cover any part of the amplifier.
- Never expose the unit to rain or moisture.
- Do not open the case covers. There are no user serviceable parts inside.
- This unit is intended for use in moderate climates.
- Always turn off the amplifier when changing leads or speaker cables.



regal

Made in England