

VideoMicro

Compact On-Camera Microphone

AUSTRALIA
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fax: +61 2 9648 2455

USA
PO Box 91028, Long Beach CA 90809-1028
Ph: +1 562 364 7400 Fax: +1 888 412 4664




Specifications


Acoustic Principle	Pressure Gradient
Polar Pattern	Cardioid
Frequency Range	100Hz - 20kHz
Signal to Noise Ratio	75dB SPL
Equivalent Noise	20 dB SPL
Maximum SPL	140dB SPL
Sensitivity	-33dB re 1V/Pa (22mV @ 94dB SPL) ± 2dB @ 1kHz
Dynamic Range	120dB SPL
Power Requirement	Plug-in power required (2V-5V DC)
Output connection	3.5mm TRS mini-jack (dual mono)
Microphone Dimensions	80mm x 21mm
Weight	42gm (1.5oz)

Features


- Compact size and lightweight - only 80mm (3") long and 42gm (1.5oz)
- All-metal microphone body
- No battery required (powered by camera plug-in power - min 2V)
- Rycote® Lyre® shock mount included
- Deluxe furry windshield included
- Designed and manufactured in Australia
- 2 year warranty with online registration at www.rote.com/warranty

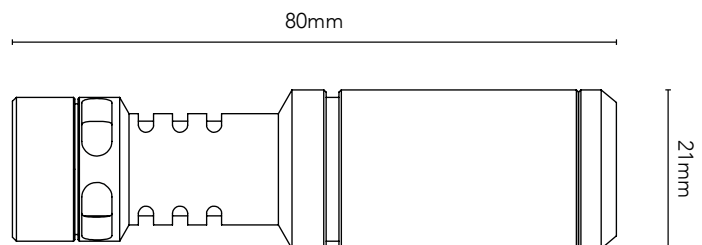

Polar pattern

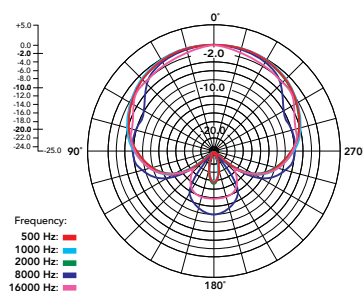

Frequency response

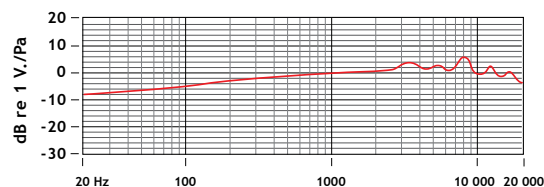

RØDE
MICROPHONES