



- 1,5" voice coil Kapton former
- Ferrite magnet
- Rubber surround with DAR technology
- Cone waterproof treatment
- Ventilated voice coil to reduce power compression
- 89.7 dB sensitivity




Specifications	
Nominal Diameter	132mm (5")
Nominal Impedance	8Ω
Rated Power AES <sup>(1)</sup>	80W
Continuous Program Power <sup>(2)</sup>	160W
Sensitivity @ 1W/1m <sup>(3)</sup>	89.7dB
Voice Coil Diameter	38mm (1,5")
Voice Coil Winding Depth	12mm
Magnetic Gap Depth	6mm
Flux Density	0.98T
Magnet Weight	426g
Net Weight	1.4kg

Thiele & Small Parameters <sup>(4)</sup>			
Re	5.51Ω	Fs	62.0Hz
Qms	5.20	Qes	0.41
Qts	0.38	Mms	8.2g
Cms	804μm/N	Bxl	6.53Tm
Vas	7.0l	Sd	78.5cm <sup>2</sup>
X max <sup>(5)</sup>	+/-3.5mm	X var <sup>(6)</sup>	+/-6.0mm
η <sub>0</sub>	0.39%	Le (1kHz)	0.48mH

Constructive Characteristics	
Magnet	: Ferrite
Basket Material	: Aluminium Die-Cast
Voice Coil Winding Material	: Aluminium
Voice Coil Former Material	: Kapton
Cone Material	: Paper
Cone Treatment	: Surface Waterproof Treatment
Surround Material	: Rubber
Dust Dome Material	: Treated Cloth

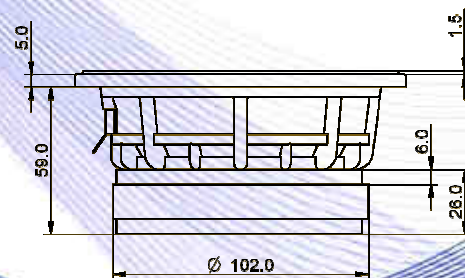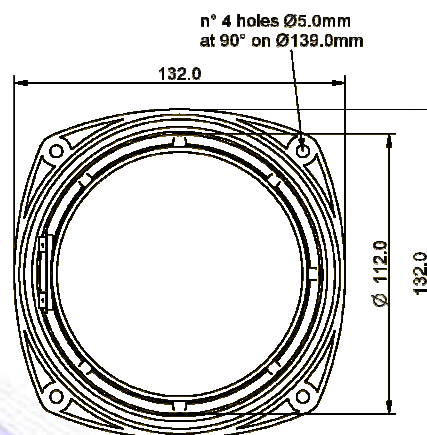

Frequency Response on IEC Baffle (DIN 45575) @ 1W,1m – Free Air Impedance

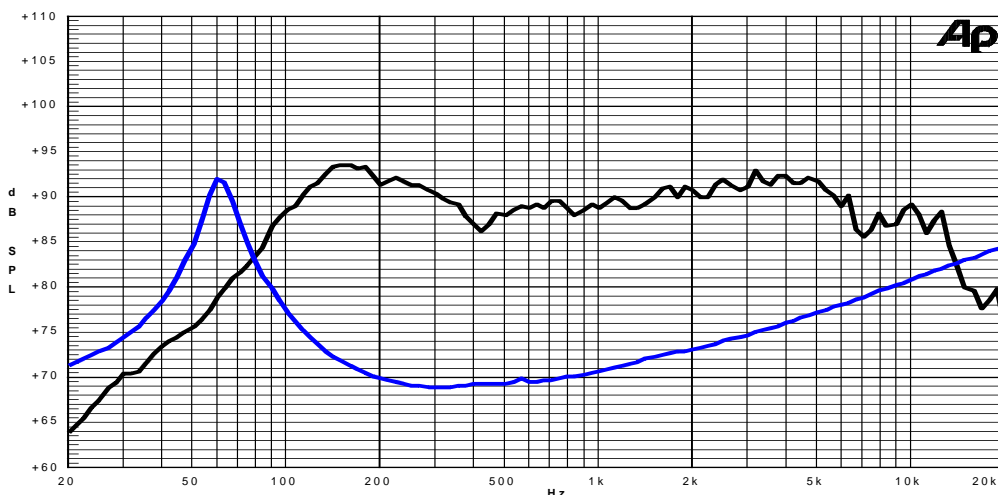

- Note:
- 1 : Rated Power measured with 2 hours test with pink noise signal, 6dB crest factor, loudspeaker mounted on enclosure
  - 2: Power on Continuous Program is defined as 3 dB greater than the Rated Power
  - 3: Calculated by Thiele & Small parameters
  - 4: Thiele & Small parameters measured with laser system without preconditioning test
  - 5: Measured with respect to a THD of 10% using a parameter-based method
  - 6: Value corresponding to a decay of the Force Factor, or Compliance, or both, equal to the 50% of the small signal value.
  - 7: Drawing dimensions: mm
  - 8: The notch around 400Hz on the frequency response is typical of the measurement on IEC baffle