



- 1.5" voice coil aluminium former aluminium wire.
- Progressive wave Konex spider.
- 92.1 dB sensitivity.




Specifications	
Nominal Diameter	166mm (6")
Nominal Impedance	4Ω
Rated Power AES ⁽¹⁾	80W
Continuous Program Power ⁽²⁾	160W
Sensitivity @ 1W/1m ⁽³⁾	92.1 dB
Voice Coil Diameter	38mm (1.5")
Voice Coil Winding Depth	7mm
Magnetic Gap Depth	6mm
Flux Density	1.05T
Magnet Weight	426g
Net Weight	1.5kg

Thiele & Small Parameters ⁽⁴⁾			
Re	3.23Ω	Fs	130.9Hz
Qms	1.98	Qes	0.95
Qts	0.64	Mms	9.1g
Cms	163μm/N	Bxl	5.04Tm
Vas	3.5l	Sd	122.7cm ²
X max ⁽⁵⁾	+/-2.4mm	X var ⁽⁶⁾	+/-5.0mm
η ₀	0.79%	Le (1kHz)	0.20mH

Costructive Characteristics	
Magnet	: Ferrite
Basket Material	: Aluminium Die-Cast
Voice Coil Winding Material	: Aluminium
Voice Coil Former Material	: Aluminium
Cone Material	: Paper
Cone Treatment	: No
Surround Material	: Treated Cloth
Dust Dome Material	: Paper Ogive

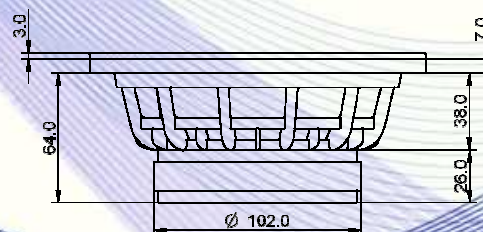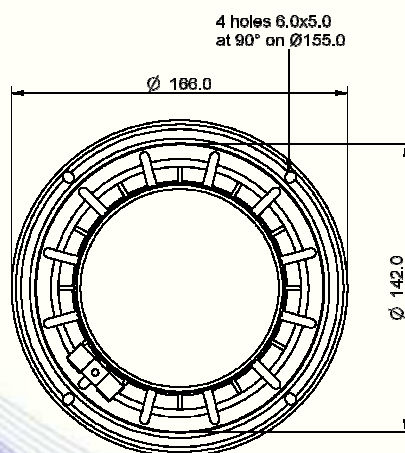

Frequency Response on IEC Baffle (DIN 45575) @ 1W,1m – Free Air Impedance

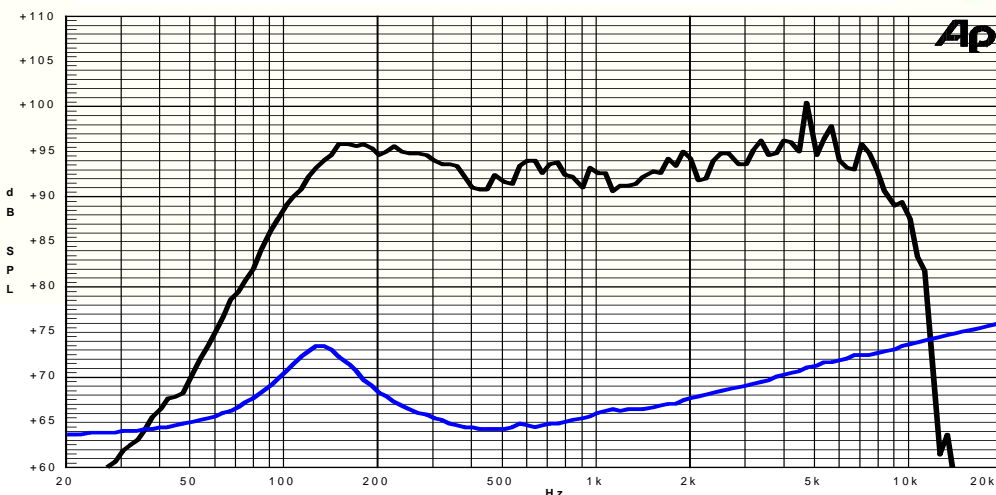

- Note:
- 1 : Rated Power measured with 2 hours test with pink noise signal, 6dB crest factor, loudspeaker mounted on enclosure
 - 2: Power on Continuous Program is defined as 3 dB greater than the Rated Power
 - 3: Calculated by Thiele & Small parameters
 - 4: Thiele & Small parameters measured with laser system without preconditioning test
 - 5: Measured with respect to a THD of 10% using a parameter-based method
 - 6: Value corresponding to a decay of the Force Factor, or Compliance, or both, equal to the 50% of the small signal value.
 - 7: Drawing dimensions: mm
 - 8: The notch around 400Hz on the frequency response is typical of the measurement on IEC baffle