



- 2,5" sandwich voice coil fiberglass former
- Progressive wave Konex spider
- Cloth surround with DAR technology
- Cone waterproof treatment
- Ventilated voice coil to reduce power compression
- High excursion ferrite magnet circuit
- 93.0 dB sensitivity




Specifications	
Nominal Diameter	210mm (8")
Nominal Impedance	8Ω
Rated Power AES ⁽¹⁾	250W
Continuous Program Power ⁽²⁾	500W
Sensitivity @ 1W/1m ⁽³⁾	93.0dB
Voice Coil Diameter	65mm (2,5")
Voice Coil Winding Depth	18mm
Magnetic Gap Depth	8mm
Flux Density	0.89T
Magnet Weight	1430g
Net Weight	4.5kg

Thiele & Small Parameters ⁽⁴⁾			
Re	5.10Ω	Fs	56.0Hz
Qms	3.39	Qes	0.38
Qts	0.34	Mms	30.3g
Cms	266µm/N	Bxl	11.90Tm
Vas	17.2l	Sd	213.8cm ²
X max ⁽⁵⁾	+/-5.0mm	X var ⁽⁶⁾	+/-7.0mm
η ₀	0.76%	Le (1kHz)	1.00mH

Constructive Characteristics	
Magnet	: Ferrite
Basket Material	: Aluminium Die-Cast
Voice Coil Winding Material	: Copper
Voice Coil Former Material	: Fiberglass
Cone Material	: Paper
Cone Treatment	: Surface Waterproof Treatment
Surround Material	: Treated Cloth
Dust Dome Material	: Solid Paper

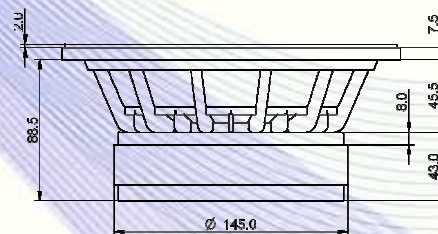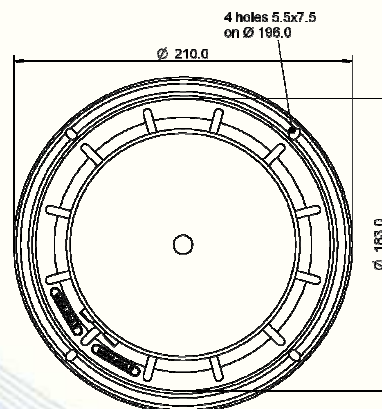

Frequency Response on IEC Baffle (DIN 45575) @ 1W,1m – Free Air Impedance

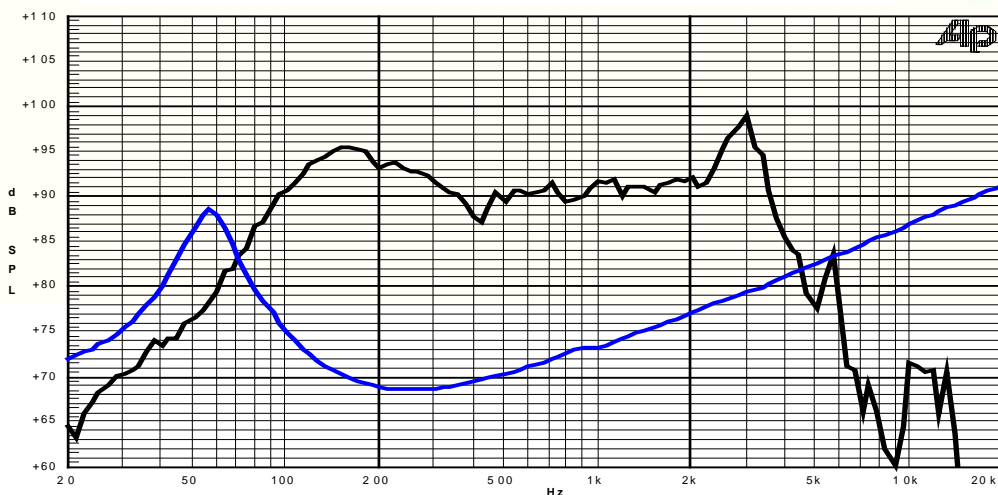

- Note:
- 1 : Rated Power measured with 2 hours test with pink noise signal, 6dB crest factor, loudspeaker mounted on enclosure
 - 2: Power on Continuous Program is defined as 3 dB greater than the Rated Power
 - 3: Calculated by Thiele & Small parameters
 - 4: Thiele & Small parameters measured with laser system without preconditioning test
 - 5: Measured with respect to a THD of 10% using a parameter-based method
 - 6: Value corresponding to a decay of the Force Factor, or Compliance, or both, equal to the 50% of the small signal value.
 - 7: Drawing dimensions: mm
 - 8: The notch around 400Hz on the frequency response is typical of the measurement on IEC baffle