
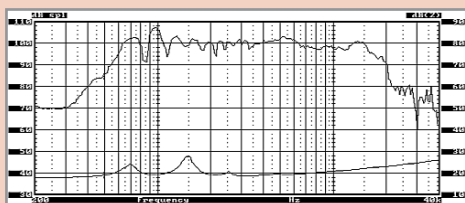


**PA-D4155**

COMPRESSION DRIVER

Art.-Nr. 141 0351
Stück/€ 36.91**Beschreibung**


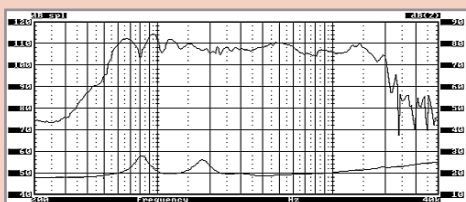
Abmessung (in.)	1.0
Austrittsöffnung (mm)	1.0
Farbe	Schwarz
Impedanz (Ohm)	8
Belastbarkeit / RMS (Watt)	20
Belastbarkeit / Sinus (Watt)	40
Wirkungsgrad 1w/1m (dB)	100
Frequenzbereich	2500-18000
Magnet Material	Ferrite
Schwingspule Material	Aluminium
Schwingspule ø (in.)	1.35
Terminals	Solder On
Membran Material	Titanium
Montage Type	Screw-On

T/S Parameter

Fs (Hz)	1900.0
Re (ohm)	6.4
BL (T/m)	1.5

**PA-DE34**

COMPRESSION DRIVER

Art.-Nr. 141 0365
Stück/€ 49.83**Beschreibung**


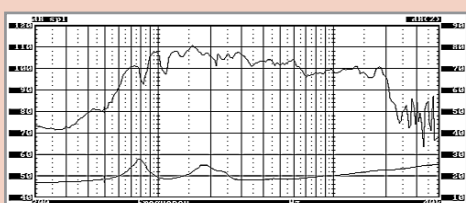
Abmessung (in.)	1.0
Austrittsöffnung (mm)	1.0
Farbe	Schwarz
Impedanz (Ohm)	8
Belastbarkeit / RMS (Watt)	20
Belastbarkeit / Sinus (Watt)	30
Wirkungsgrad 1w/1m (dB)	105
Frequenzbereich	500-20000
Magnet Material	Ferrite
Schwingspule Material	Aluminium
Schwingspule ø (in.)	1.35
Trennfrequenz (ab Hz)	1000.0
Terminals	Solder On
Membran Material	Titanium
Montage Type	Bolt-On

T/S Parameter

Fs (Hz)	800.0
Re (ohm)	6.4
BL (T/m)	1.6

**PA-DE34S**

COMPRESSION DRIVER

Art.-Nr. 141 0367
Stück/€ 53.52**Beschreibung**

Abmessung (in.)	1.0
Austrittsöffnung (mm)	1.0
Farbe	Schwarz
Impedanz (Ohm)	8
Belastbarkeit / RMS (Watt)	20
Belastbarkeit / Sinus (Watt)	30
Wirkungsgrad 1w/1m (dB)	105
Frequenzbereich	500-20000
Magnet Material	Ferrite
Schwingspule Material	Aluminium
Schwingspule ø (in.)	1.35
Trennfrequenz (ab Hz)	1000.0
Terminals	Solder On
Membran Material	Aluminium
Montage Type	Screw-On

T/S Parameter

Fs (Hz)	1700.0
Re (ohm)	6.4
BL (T/m)	1.6