
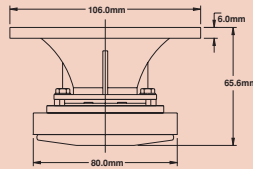


PHT 407T
HIGH FREQUENCY TWEETER

Art.-Nr. 141 0427
Stück/€ 33.22

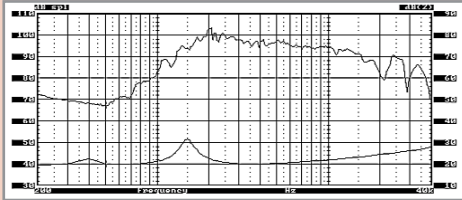


Beschreibung

Farbe	Schwarz
Impedanz (Ohm)	8
Belastbarkeit / RMS (Watt)	15
Belastbarkeit / Sinus (Watt)	30
Wirkungsgrad 1w/1m (dB)	100
Frequenzbereich	900-20000
Polplatten Material	1008 Cold Roll Steel
Magnet Material	Ferrite
Schwingspule Material	Kupfer
Schwingspule ϕ (in.)	1.0
Terminals	Solder On
Abstrahlwinkel	90°x90°
Membran Material	Titanium
Horn Material	ABS+Glass fiber
Montage Type	Screw-On



T/S Parameter

Fs (Hz)	1500.0
Re (ohm)	8.0
Hvc (mm)	1.8
Hag (mm)	2.5

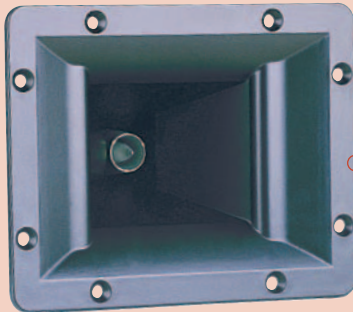

PHT 408
HIGH FREQUENCY
COMPRESSION DRIVER W/HORN

Art.-Nr. 141 0429
Stück/€ 26.57

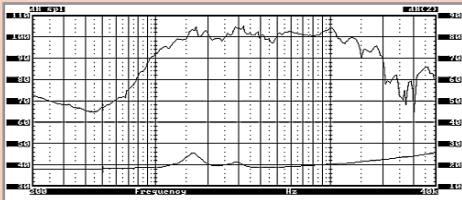


Beschreibung

Farbe	Schwarz
Impedanz (Ohm)	8
Belastbarkeit / RMS (Watt)	30
Belastbarkeit / Sinus (Watt)	60
Wirkungsgrad 1w/1m (dB)	105
Frequenzbereich	2000-15000
Magnet Material	Ferrite
Schwingspule Material	Kupfer
Schwingspule ϕ (in.)	1.0
Terminals	Solder On
Abstrahlwinkel	90°x40°
Membran Material	Phenolic resin
Horn Material	ABS
Montage Type	Screw-On



T/S Parameter

Fs (Hz)	1700.0
Re (ohm)	7.2
Hvc (mm)	4.0
Hag (mm)	4.0

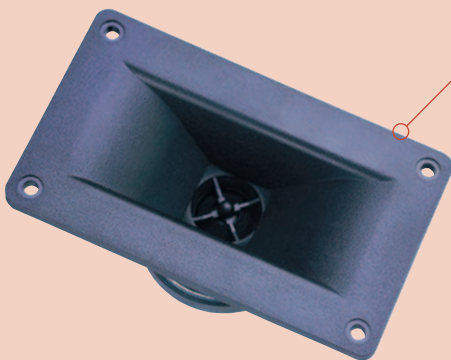

PHT 409
HIGH FREQUENCY
COMPRESSION DRIVER W/HORN

Art.-Nr. 141 0431
Stück/€ 16.98

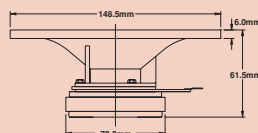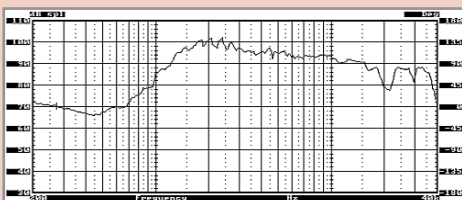

Beschreibung

Farbe	Schwarz
Impedanz (Ohm)	8
Belastbarkeit / RMS (Watt)	15
Belastbarkeit / Sinus (Watt)	30
Wirkungsgrad 1w/1m (dB)	100
Frequenzbereich	900-20000
Magnet Material	Ferrite
Schwingspule Material	Kupfer
Schwingspule ϕ (in.)	1.0
Terminals	Solder On
Abstrahlwinkel	90°x40°
Membran Material	PEI
Horn Material	ABS+Glass fiber
Montage Type	Screw-On

T/S Parameter

Fs (Hz)	2000.0
---------	--------