





### PHT 411

HIGH FREQUENCY  
COMPRESSION DRIVER W/HORN

Art.-Nr. 141 0436  
Stück/€ 29.53

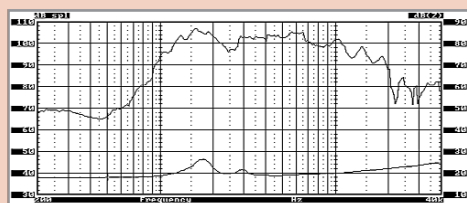


#### Beschreibung

Farbe	Schwarz
Impedanz (Ohm)	8
Belastbarkeit / RMS (Watt)	30
Belastbarkeit / Sinus (Watt)	60
Wirkungsgrad 1w/1m (dB)	105
Frequenzbereich	2000-15000
Magnet Material	Ferrite
Schwingspule Material	Kupfer
Schwingspule $\phi$ (in.)	1.0
Terminals	Solder On
Abstrahlwinkel	100°x40°
Membran Material	Phenolic resin
Horn Material	ABS
Montage Type	Screw-On

#### T/S Parameter



Fs (Hz)	1800.0
---------	--------

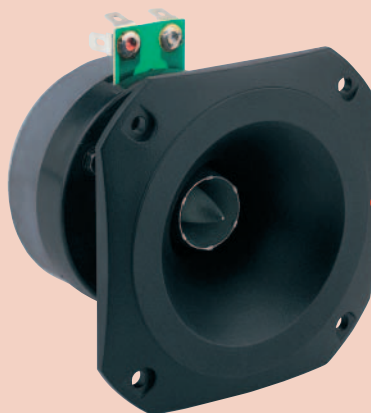

### PHT 413

HIGH FREQUENCY  
COMPRESSION DRIVER W/HORN

Art.-Nr. 141 0440  
Stück/€ 22.14

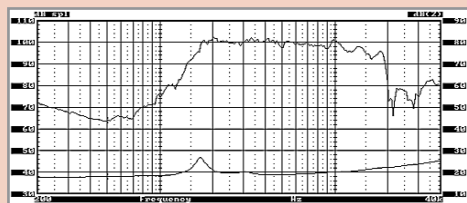

#### Beschreibung

Farbe	Schwarz
Impedanz (Ohm)	8
Belastbarkeit / RMS (Watt)	30
Belastbarkeit / Sinus (Watt)	60
Wirkungsgrad 1w/1m (dB)	105
Frequenzbereich	2000-15000
Magnet Material	Ferrite
Schwingspule Material	Kupfer
Schwingspule $\phi$ (in.)	1.0
Terminals	Solder On
Abstrahlwinkel	90°x40°
Membran Material	Phenolic resin
Horn Material	ABS
Montage Type	Screw-On

#### T/S Parameter



Fs (Hz)	1800.0
---------	--------



### PST 545

TWEETER

Art.-Nr. 141 0454  
Stück/€ 81.20

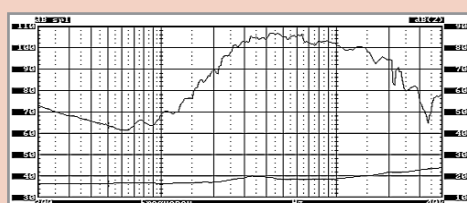

#### Beschreibung

Farbe	Schwarz
Impedanz (Ohm)	8
Belastbarkeit / RMS (Watt)	75
Belastbarkeit / Sinus (Watt)	300
Wirkungsgrad 1w/1m (dB)	112
Frequenzbereich	1900-20000
Korb Material	Die cast Aluminum
Polplatten Material	1008 Cold Roll Steel
Magnet Material	Ferrite
Schwingspule Material	Aluminium
Schwingspule $\phi$ (in.)	1.75
Terminals	Gold Plated Push
Abstrahlwinkel	60°x40°
Membran Material	Titanium
Montage Type	Bolt-On

#### T/S Parameter

Fs (Hz)	3500.0
Re (ohm)	6.5