



SN Serie



SN-D34S

COMPRESSION DRIVER

Art.-Nr. 141 0560
Stück/€ 81.20

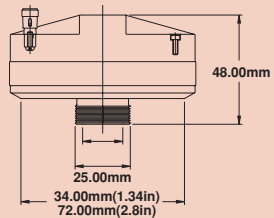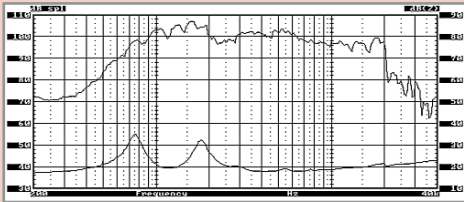

Beschreibung

Abmessung (in.)	1.0
Austrittsöffnung (mm)	1.0
Farbe	Schwarz
Impedanz (Ohm)	8
Belastbarkeit / RMS (Watt)	40
Belastbarkeit / Sinus (Watt)	80
Wirkungsgrad 1w/1m (dB)	104
Frequenzbereich	2000-20000
Polplatten Material	1008 Cold Roll Steel
Magnet Material	Neodymium
Schwingspule Material	Aluminium
Spulenträger Material	Kapton
Schwingspule \varnothing (in.)	1.3
Terminals	Gold Plated Push
Membran Material	Titanium
Kurzschlußring	Nein
Montage Type	Screw-On

T/S Parameter



Fs (Hz)	750.0
Re (ohm)	6.5
BL (T/m)	1.6



SN-D44

COMPRESSION DRIVER

Art.-Nr. 141 0562
Stück/€ 95.96

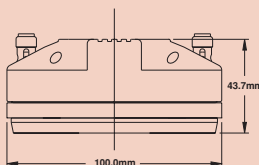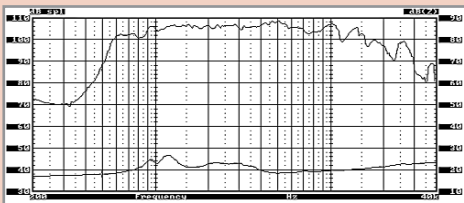


Beschreibung

Abmessung (in.)	1.0
Austrittsöffnung (mm)	1.0
Farbe	Schwarz
Impedanz (Ohm)	8
Belastbarkeit / RMS (Watt)	60
Belastbarkeit / Sinus (Watt)	120
Wirkungsgrad 1w/1m (dB)	106
Frequenzbereich	1500-20000
Polplatten Material	1008 Cold Roll Steel
Magnet Material	Neodymium
Schwingspule Material	Aluminium
Spulenträger Material	Kapton
Schwingspule \varnothing (in.)	1.75
Terminals	Gold Plated Push
Membran Material	Titanium
Kurzschlußring	Nein
Montage Type	Bolt-On

T/S Parameter

Fs (Hz)	1200.0
Re (ohm)	6.5
BL (T/m)	1.6



P Serie

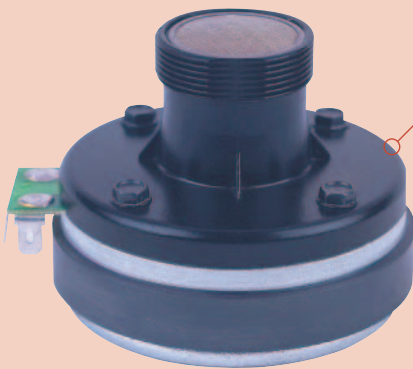

PA-D26S

COMPRESSION DRIVER

Art.-Nr. 141 0343
Stück/€ 20.30

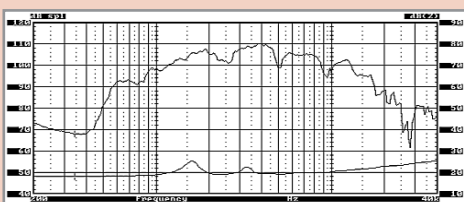

Beschreibung

Abmessung (in.)	0.87
Austrittsöffnung (mm)	0.87
Farbe	Schwarz
Impedanz (Ohm)	8
Belastbarkeit / RMS (Watt)	30
Belastbarkeit / Sinus (Watt)	60
Wirkungsgrad 1w/1m (dB)	105
Frequenzbereich	500-15000
Magnet Material	Ferrite
Schwingspule Material	Aluminium
Schwingspule \varnothing (in.)	1.0
Terminals	Solder On
Membran Material	Phenolic resin
Montage Type	Screw-On

T/S Parameter

Fs (Hz)	3300.0
Re (ohm)	7.6
BL (T/m)	1.2