

## Revelator 6½" Midwoofer



**Type Number:** 18W/16831G00

### Features:

The Revelator series has for years been celebrated for producing the best sounding electro dynamic transducers in the world. Since ScanSpeak was founded in 1970, the audio engineers and R&D experts working on the line have been on a quest to create drivers that reveal all the sound in recordings, hiding nothing from the listener. This quest has resulted in several revolutionary inventions that remove distortion in the magnet systems and in the moving parts of the speaker. The philosophy is that the sound has to be very dynamic, giving a perfect transient response and providing tonal balance.

One of the latest inventions realized in the Revelator midrange design is the sliced paper cone, which reduces break-up modes in the membrane dramatically. The result is an undisputed clarity in sound.

Driver Highlights: 18W/8831G00 in 16 ohm



### Specs:

#### Electrical Data

Nominal impedance	Zn	16	ohm
Minimum impedance	Zmin	--	ohm
Maximum impedance	Zo	--	ohm
DC resistance	Re	12.2	ohm
Voice coil inductance	Le	0.6	mH

#### T-S Parameters

Resonance Frequency	fs	27	Hz
Mechanical Q factor	Qms	4.7	
Electrical Q factor	Qes	0.42	
Total Q factor	Qts	0.39	
Ratio fs/Qts	F	--	
Force factor	Bl	9.4	Tm
Mechanical resistance	Rms	0.65	Kg/s
Moving mass	Mms	18	g
Suspension compliance	Cms	--	mm/N
Effective cone diameter	D	--	cm
Effective piston area	Sd	150	cm <sup>2</sup>
Equivalent volume	Vas	61.5	ltrs
Sensitivity		83	dB
Ratio BL/√(Re)		--	


#### Power handling

100h RMS noise test (IEC)	60	W
Long-term Max System Power (IEC)	--	W
Max linear SPL (rms) @ power	--	dB/W
Short Term Max power	--	W

#### Voice Coil and Magnet Parameters

Voice coil diameter	38	mm
Voice coil height	--	mm
Voice coil layers	--	
Height of the gap	--	mm
Linear excursion +/-	6.5	mm
Max mech. excursion +/-	11	mm
Flux density of gap	--	mWb
Total useful flux	--	mWb
Diameter of magnet	--	mm
Height of magnet	--	mm
Weight of magnet	--	Kg

**Frequency:**

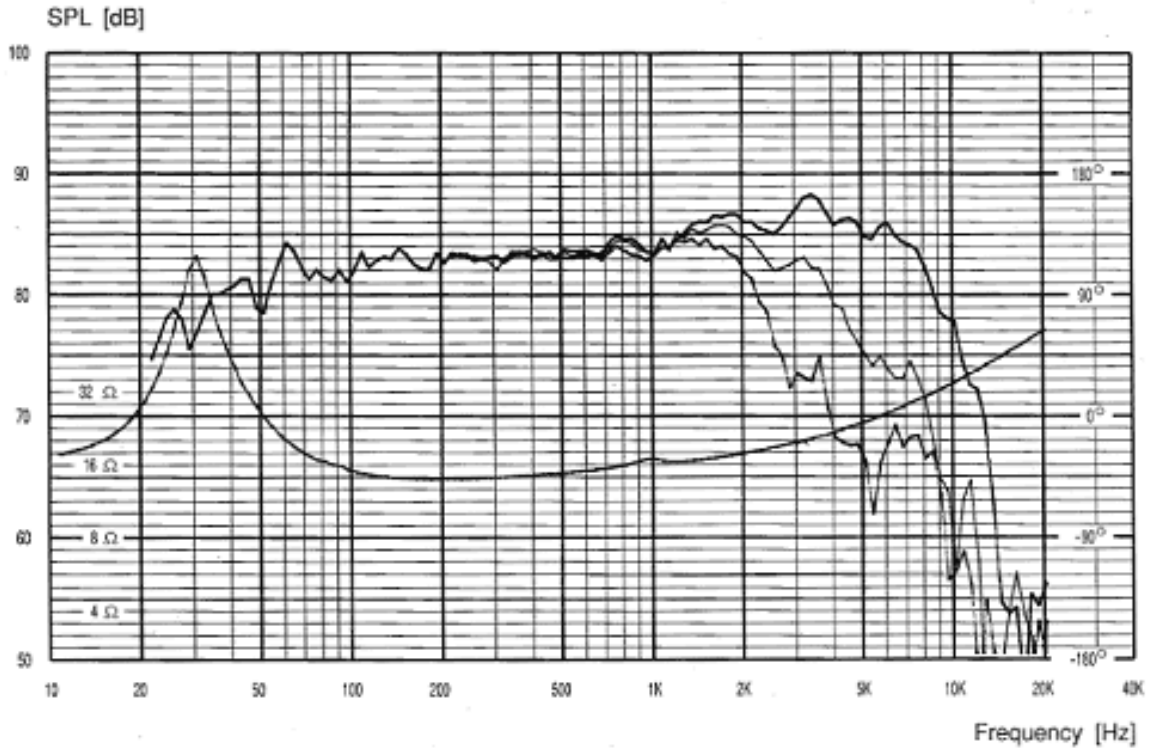

**Mechanical Dimensions:**

