

Revelator 6½" Midwoofer



Type Number: 18W/4831G00

Features:

The Revelator series has for years been celebrated for producing the best sounding electro dynamic transducers in the world. Since ScanSpeak was founded in 1970, the audio engineers and R&D experts working on the line have been on a quest to create drivers that reveal all the sound in recordings, hiding nothing from the listener. This quest has resulted in several revolutionary inventions that remove distortion in the magnet systems and in the moving parts of the speaker. The philosophy is that the sound has to be very dynamic, giving a perfect transient response and providing tonal balance.

One of the latest inventions realized in the Revelator midrange design is the sliced paper cone, which reduces break-up modes in the membrane dramatically. The result is an undisputed clarity in sound.


Dimensions are the same as for 18W8831G00



Specs:

Electrical Data	Zn	4	ohm	Power handling	70	W
Nominal impedance	Zmin	-	_	100h RMS noise test (IEC)	70	W
Minimum impedance			ohm	Long-term Max System Power		VV
Maximum impedance	Zo		ohm	(IEC)		dB/W
DC resistance	Re	3.4	ohm	Max linear SPL (rms) @ power		
Voice coil inductance	Le	0.3	mΗ	Short Term Max power		W
T-S Parameters				Voice Coil and Magnet Parameters		
Resonance Frequency	fs	33	Hz	Voice coil diameter	38	mm
Mechanical Q factor	Qms	5.2		Voice coil height		mm
Electrical Q factor	Qes	0.38		Voice coil layers		
Total Q factor	Qts	0.35		Height of the gap		mm
	F			Linear excursion +/-	6.5	mm
Ratio fs/Qts	BI		Tm	Max mech. excursion +/-	11	mm
Force factor		5.7	Tm			mWb
Mechanical resistance	Rms	0.7	Kg/s	Flux density of gap		_
Moving mass	Mms	17.5	g	Total useful flux		mWb
Suspension compliance	Cms		mm/N	Diameter of magnet		mm
Effective cone diameter	D		cm	Height of magnet		mm
Effective piston area	Sd	150	cm ²	Weight of magnet		Kg
Equivalent volume	Vas	42	Itrs			
Sensitivity		90	dB			
Ratio BL/√(Re)						
naliu DL/ V(NE)						

Frequency:

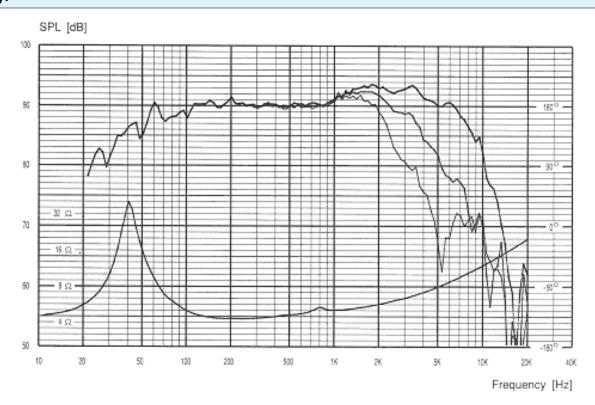

Mechanical Dimensions:

