

New 1" Tweeter



Type Number: D3004/660000

Features:

The new D3004/660000 builds on the experience of the one-inch R29 ring radiator, resulting in low resonance frequency, but further provides the extended dispersion characteristics of a ¾-inch dome. Tymphany's unique AirCirc Magnet System -- named for the way it optimizes air flow within the chamber – rearranges the traditional magnet structure from a single magnet to an open magnetic circuit comprised of six separate neodymium slugs. This, in combination with the chamber, results in the elimination of the reflections and resonances that compromise the performance of traditional motors. The D3004/660000 gives engineers improved control over critical midrange performance, for superb vocal rendition and excellent imaging at all listening locations.


Driver Highlights: 1" soft dome, AirCirc Magnet System, aluminum faceplate




Specs:


Electrical Data				Power handling		
Nominal impedance	Zn	4	ohm	100h RMS noise test (IEC)	160	W
Minimum impedance	Zmin		ohm	Long-term Max System Power		W
Maximum impedance	Zo	16.9	ohm	(IEC)		
DC resistance	Re	3	ohm	Short Term Max power		W
Voice coil inductance	Le	0.03	mH	Voice Coil and Magnet Parameters		
T-S Parameters				Voice coil diameter	26	mm
Resonance Frequency	fs	520	Hz	Voice coil height	2.1	mm
Mechanical Q factor	Qms			Voice coil layers	2	
Electrical Q factor	Qes			Height of the gap	2.5	mm
Total Q factor	Qts			Linear excursion +/-	0.2	mm
Force factor	BI	2.5	Tm	Max mech. excursion +/-	1.6	mm
Mechanical resistance	Rms		Kg/s	Flux density of gap		mWb
Moving mass	Mms	0.35	g	Total useful flux		mWb
Suspension compliance	Cms		mm/N	Diameter of magnet		mm
Effective cone diameter	D		cm	Height of magnet		mm
Effective piston area	Sd	7	cm ²	Weight of magnet		Kg
Equivalent volume	Vas		ltrs			
Sensitivity		92.5	dB			

Frequency:

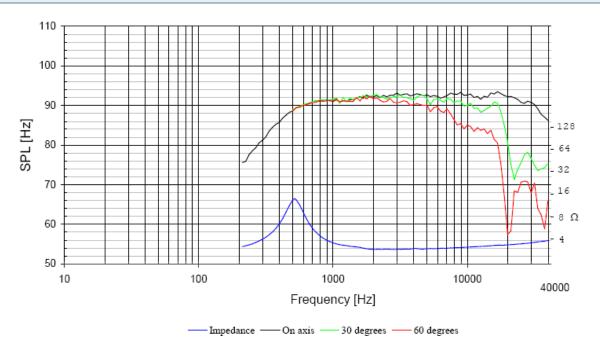

Mechanical Dimensions:



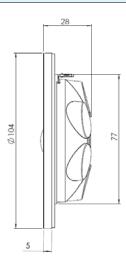

Drawing Dimensions

Outside Diameter Flange Thickness Magnet Diameter **Cutout Diamnter** Interior Depth Hole Diameter Screw Cirle Diameter