



27mm High Definition precoated fabric dome tweeter with a wide, soft polymer surround designed to give high stability without magnetic fluid damping. The dome and surround materials give high consistency and excellent stability against variations in air humidity.

The voice coil is wound on an aluminium voice coil former with adequate ventilating holes to eliminate noise from internal air flow. A shielded magnet system allows use in close proximity to video screens and TV sets. Using the screening can as a rear chamber with optimal acoustic damping allows 27TDC/TV to be used with moderately low crossover frequencies.

The chassis is precision moulded from glass fibre reinforced plastic, and its front design offers optimum radiation conditions.

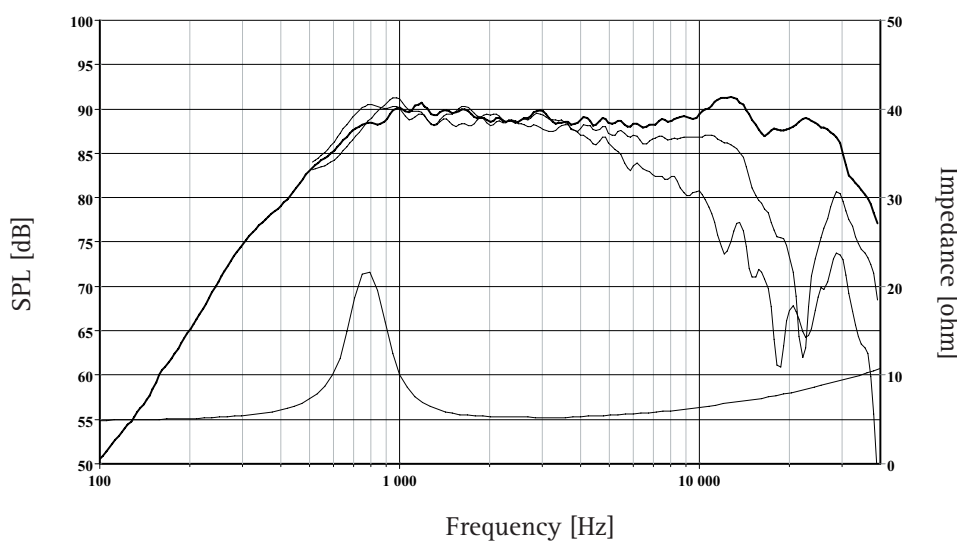

The frequency responses above show measured free field sound pressure in 0, 30, and 60 degrees, mounted in a 0.6m by 0.8m baffle. Input 2.83 Vrms, microphone distance 0.5m, normalized to SPL 1m. The impedance is measured without baffle using a 2V sine signal.

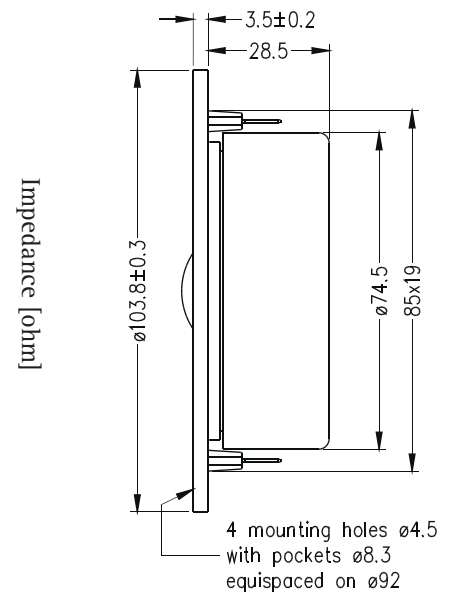

|  |                |                           |                     |
|--|----------------|---------------------------|---------------------|
| Nominal Impedance                      | 6 Ohms         | Voice Coil Resistance     | 4.8 Ohms            |
| Recommended Frequency Range            | 200 - 25000 Hz | Voice Coil Inductance     | 0.05 mH             |
| Short Term Power Handling *            | 150 W          | Force Factor              | 2.8 N/A             |
| Long Term Power Handling *             | 55 W           | Free Air Resonance        | 800 Hz              |
| Characteristic Sensitivity (2.83V, 1m) | 89.5 dB        | Moving Mass               | 0.30 g              |
| Voice Coil Diameter                    | 26 mm          | Effective Piston Area     | 7.0 cm <sup>2</sup> |
| Voice Coil Height                      | 1.5 mm         | Magnetic Gap Flux Density | 1.5 T               |
| Air Gap Height                         | 2 mm           | Magnet Weight             | 0.40 kg             |
| Linear Coil Travel (p-p)               | 0.5 mm         | Total Weight              | 0.50 kg             |