



The L22RNX/P is an 8" cone driver with an injection moulded metal chassis developed for use as a high fidelity woofer unit. The extremely stiff aluminum cone gives tremendous bass precision. The cone and the low loss rubber surround show no sign of the familiar 500-1500 Hz cone edge resonance and distortion associated with soft cones. On the other hand, the cone break up modes at higher frequencies call for special attention in the crossover design work. A long, high temperature voice coil wound on an aluminium voice coil former gives low distortion and a high power handling capacity.

The phase plug reduces compression due to temperature variations in the voice coil, eliminates resonances that would occur in the volume between the dust cap and the pole piece and increases the power handling capacity.

The large magnet system provides reasonably high efficiency and low Q.

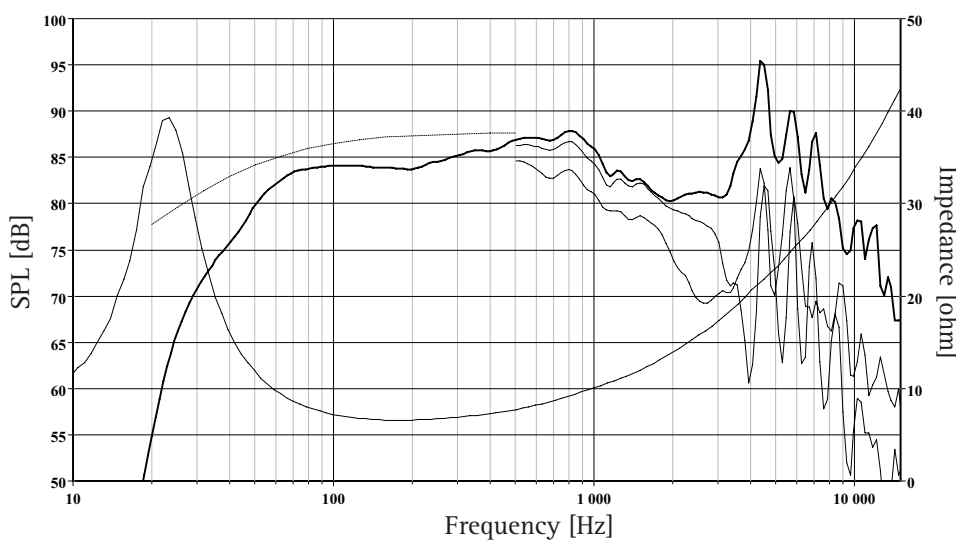

The frequency responses above show measured free field sound pressure in 0, 30, and 60 degrees angle using a 20L closed box. Input 2.83 V_{RMS}, microphone distance 0.5m, normalized to SPL 1m. The dotted line is a calculated response in infinite baffle based on the parameters given for this specific driver. The impedance is measured in free air without baffle using a 2V sine signal.

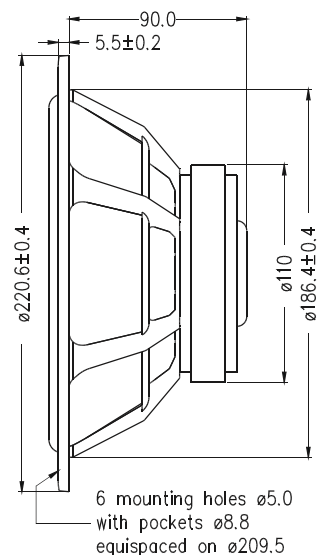

Nominal Impedance	8 Ohms	Voice Coil Resistance	6.0 Ohms
Recommended Frequency Range	25 - 2000 Hz	Voice Coil Inductance	1.43 mH
Short Term Power Handling *	300 W	Force Factor	8.15 N/A
Long Term Power Handling *	110 W	Free Air Resonance	23 Hz
Characteristic Sensitivity (2,83V, 1m)	88 dB	Moving Mass	27.0 g
Voice Coil Diameter	39 mm	Air Load Mass In IEC Baffle	1.89 g
Voice Coil Height	18 mm	Suspension Compliance	1.8 mm/N
Air Gap Height	6 mm	Suspension Mechanical Resistance	2.01 Ns/m
Linear Coil Travel (p-p)	12 mm	Effective Piston Area	220 cm ²
Maximum Coil Travel (p-p)	21 mm	VAS	112 Litres
Magnetic Gap Flux Density	1.0 T	QMS	2.07
Magnet Weight	0.64 kg	QES	0.38
Total Weight	2.20 kg	QTS	0.32