Code Z007960


- 2.5" voice coil Kapton former
- Ferrite magnet circuit
- 97.9 dB sensitivity.


Specifications				
Nominal Diameter	318mm (12")			
Nominal Impedance	4Ω			
Rated Power AES (1)	250W			
Continuous Program Power (2)	500W			
Sensitivity @ 1W/1m (3)	97.9dB			
Voice Coil Diameter	65 mm (2.5")			
Voice Coil Winding Depth	13 mm			
Magnetic Gap Depth	8mm			
Flux Density	1.16T			
Magnet Weight	1450g			
Net Weight	4.8kg			


-					100 March 100 Ma			
		Thiele & Sm	Thiele & Small Parameters (4)					
-	Re	3.12Ω	Fs		44.8Hz			
	Qms	10.12	Qe	s	0.27			
	Qts	0.26	Mn	าร	48.7g			
	Cms	260 µm/N	Bx		12.75Tm			
	Vas	88.51	Sd		490.9cm ²			
	X max ⁽⁵⁾	+/-2.8mm	Χv	′ar ⁽⁶⁾	+/-5.0mm			
	η_0	2.92%	Le	(1kHz)	0.68mH			

Constructive Characteristics					
Magnet	: Ferrite				
Basket Material	: Pressed Sheet Steel				
Voice Coil Winding Material	: Copper				
Voice Coil Former Material	: Kapton				
Cone Material	: Paper				
Cone Treatment	: No				
Surround Material	: Treated Cloth				
Dust Dome Material	: Solid Paper				



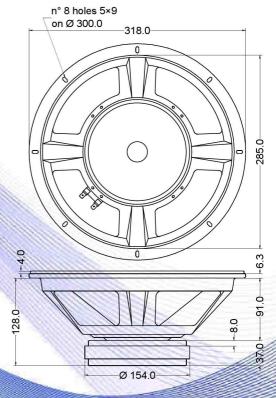



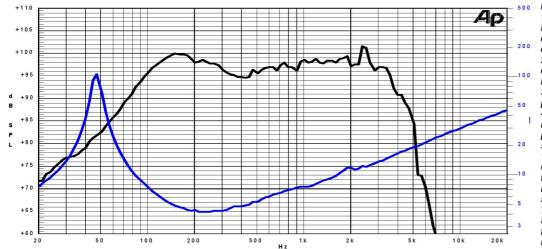

- 1 : Rated Power measured with 2 hours test with pink noise signal, 6dB crest factor, loudspeaker mounted on
- 2: Power on Continuous Program is defined as 3 dB greater than the Rated
- 3: Calculated by Thiele & Small parameters
- Thiele & Small parameters measured with laser system without preconditioning test
- 5: Measured with respect to a THD of 10% using a parameter-based method
- 6: Value corresponding to a decay of the Force Factor, or Compliance, or both, equal to the 50% of the small signal value.
- 7: Drawing dimensions: mm
- 8: The notch around 400Hz on the frequency response is typical of the measurement on IEC baffle

Due to continuing product improvement, the features and the design are subject to change without notice.