



HIGH FREQUENCY COMPRESSION DRIVER

TECHNICAL SPECIFICATIONS

Throat diameter 49 mm. 2 in. Rated impedance 8 ohms Minimum impedance 7.4 ohms @ 3.5 kHz D.C. Resistance 5.5 ohms 90 w AES above 1 kHz Power capacity * Program power 180 w above 1 kHz Sensitivity ** 112 dB 1 w @ 1m coupled to TD-400N horn Frequency range 0.6 - 20 kHz 800 Hz or higher (12 dB/oct. min.) Recommended crossover

Voice coil diameter 72.2 mm. 2.87 in.

Magnetic assembly weight 3.1 kg. 6.82 lb.

Flux density 2.2 T

BL factor 11.5 N/A

MOUNTING INFORMATION

Overall diameter

Depth

89 mm. 3.5 in.

Mounting

Four M6 threaded holes, 90° apart on 101.6 mm (4 in.) diameter circle.


Mounting hardware is supplied.

Net weight 3.5 kg. 7.7 lb.
Shipping weight 3.75 kg. 8.25 lb.

MATERIALS

- Diaphragm: titanium.
- Voice coil: edgewound aluminium ribbon wire.
- Voice coil former: kapton.
- Magnet: neodymium.

DIMENSION DRAWINGS

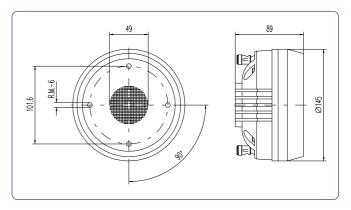

Notes:


- *The power capacity is determined according to AES2-1984 (r2003) standard.
- Program power is defined as the transducer's ability to handle normal music program material.

 **Sensitivity was measured at 1 m distance, on axis, with 1 w input, averaged in the range 1-7 kHz.

GENERAL DESCRIPTION


This high frequency compression driver features a composite structure diaphragm. It has a Mylar surround to provide damping and avoid resonant peaks typical of metal surrounds. The dome is made of pure titanium, with its unique mechanical properties. This diaphragm combined with a new optimized phasing-plug and a copper ring, results in an extremely smoothed and extended high frequency response.

FREQUENCY RESPONSE AND DISTORTION CURVES

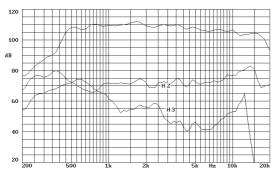

Note: on axis frequency response measured coupled to TD-400N horn in anechoic chamber, 1w @ 1m.

FREQUENCY RESPONSE AND DISTORTION CURVES

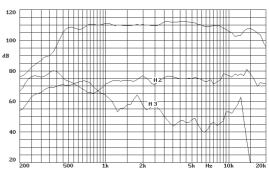

Note: on axis frequency response measured coupled to TD-460N horn in anechoic chamber, 1w @ 1m.

Polígono Industrial Moncada II · C/. Pont Sec, 1c · 46113 MONCADA - Valencia (Spain) · Tel. (34) 96 130 13 75 · Fax (34) 96 130 15 07 · http://www.beyma.com · E-mail: beyma@beyma.com ·